

LIGHTING PRODUCTS CATALOG



Ceiling-Surface

The Catania S ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

- HOUSING: Die Cast Aluminum
- DIFFUSER: Round Polycarbonate Milky Diffuser
- REFLECTOR: Polished Aluminum
- LED: Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications			
Item Code	Power	Lumen	Dimension
PLC252018	18W	2070lm	Ø298x50h
PLC252025	25W	2875lm	Ø298x50h
PLC252035	35W	4025lm	Ø400x67h

Technical Drawings



LED

SMD

IP65

50,000

CRI >90

W

Anti-Glare

Anti-Dazzle

50,000

+50 -20

CE


RoHS

IK07

SWITCH DIMMING



85~265V
50/60HZ

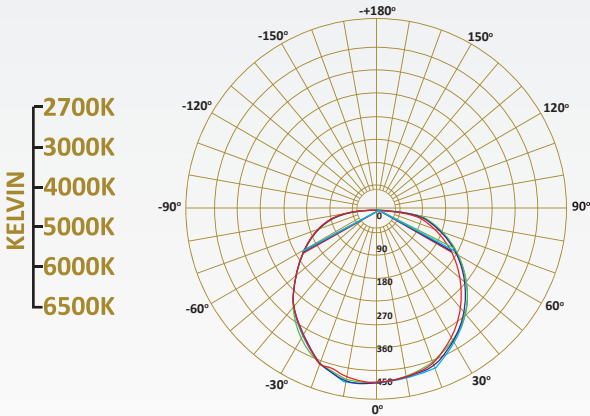



— Ceiling-Surface

The Etneo ceiling light allow the most flexibility in a lighting design. The low glare effect ensures a comfortable light effect for the human eye. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. The Etneo Ceiling Lights both installation options come with 350 degree freedom movements and high power and efficiency LED system, to ensure qualitative performance of the light output and energy saving.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Opal Polycarbonate

REFLECTOR: Polished Aluminium





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLE226012	12W	1200lm	Ø60x90x155h

Technical Drawings

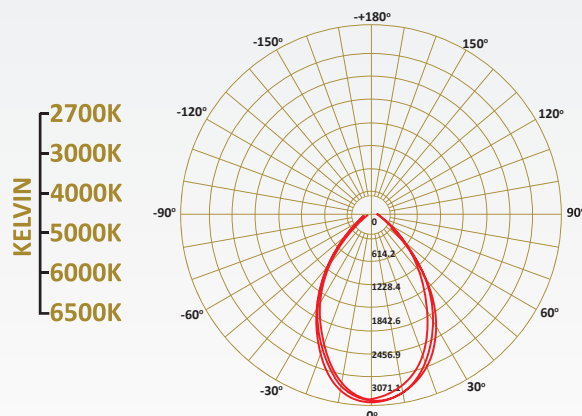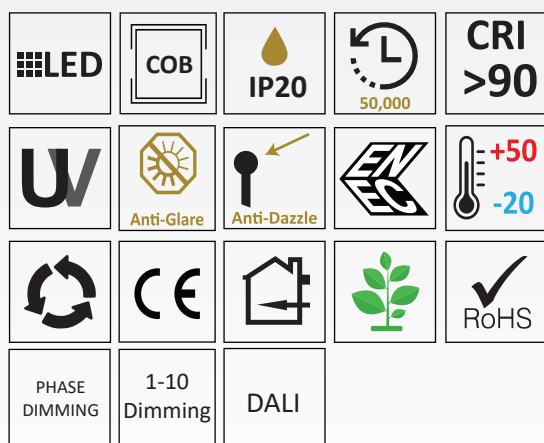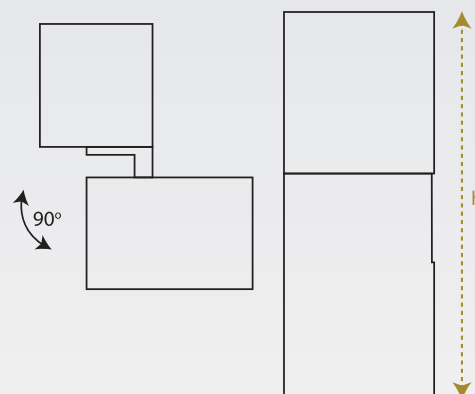

85~265V
50/60HZ

CEILING LIGHTS



— Ceiling-Surface

The Forte ceiling light has high resistance body tested in IP54 and IP65. It's decorative ceiling light with all the features/characteristics outside. IP65 means the body resistance is best suited for hard metrological conditions or humid weather. The finishing of the item is perfect in every detail with clear diffuser and anodized aluminum reflector. Suitable for commercial and residential applications indoor/outdoor like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminum in choice of RAL Colours Powder Coated

DIFFUSER: Tempered Clear Glass Diffuser

REFLECTOR: Anodized Aluminum





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLF236009	9W	1080lm	Ø90x110h
PLF237015	15W	1800lm	Ø90x180h
PLF238020	20W	2400lm	Ø150x140h
PLF239030	30W	3600lm	Ø150x200h
PLF240045	45W	5400lm	Ø180x300h


Technical Drawings

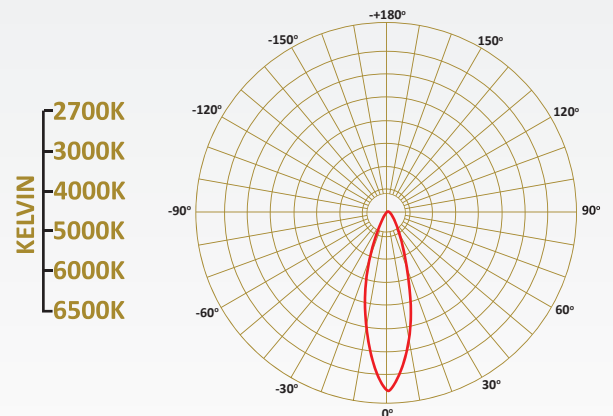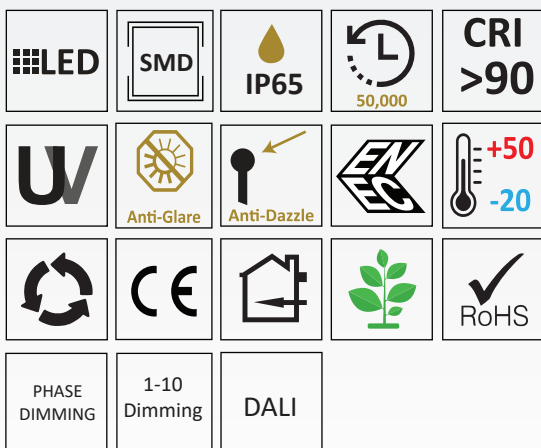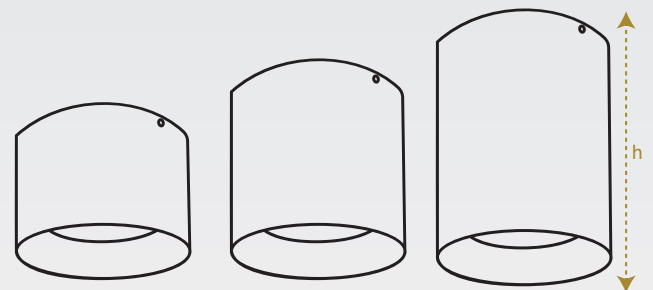

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN

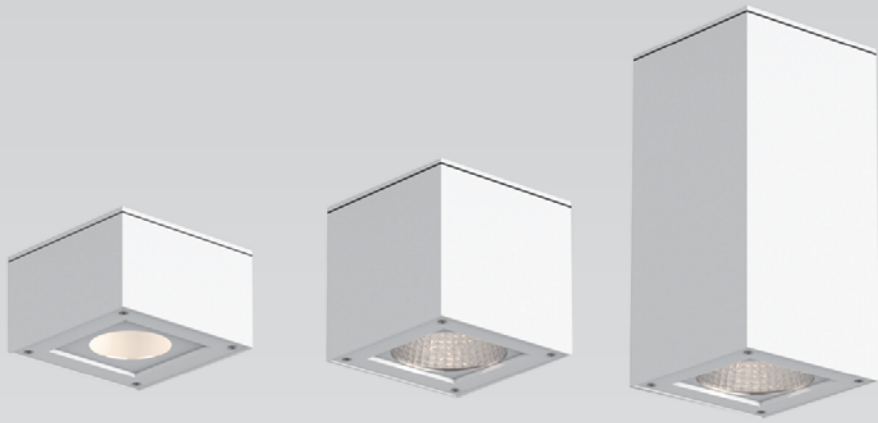


Ceiling-Surface

The Forte Quadro ceiling light has high resistance body tested in IP54 and IP65. It's decorative ceiling light with all the features/characteristics outside. IP65 means the body resistance is best suited for hard metrological conditions or humid weather. The finishing of the item is perfect in every detail with clear diffuser and anodized aluminum reflector. Suitable for commercial and residential applications indoor/outdoor like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

- HOUSING:** Die Cast Aluminum in choice of RAL Colours Powder Coated
- DIFFUSER:** Tempered Clear Glass Diffuser
- REFLECTOR:** Anodized Aluminum
- LED:** Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications			
Item Code	Power	Lumen	Dimension
PLF241009	9W	1080lm	100x100x115h
PLF242015	15W	1800lm	100x100x180h
PLF243020	20W	2400lm	100x100x200h
PLF244030	30W	3600lm	150x150x200h
PLF245045	45W	5400lm	150x150x300h

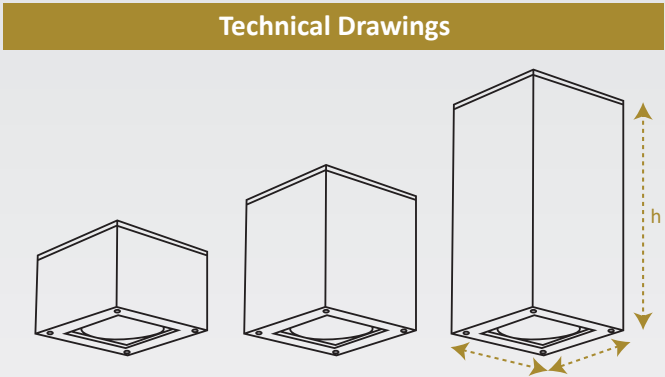

LED

SMD

IP65

50,000

CRI >90

W

Anti-Glare

Anti-Dazzle

EVG

+50 -20

Recycling



CE

RoHS

PHASE DIMMING

1-10 Dimming

DALI

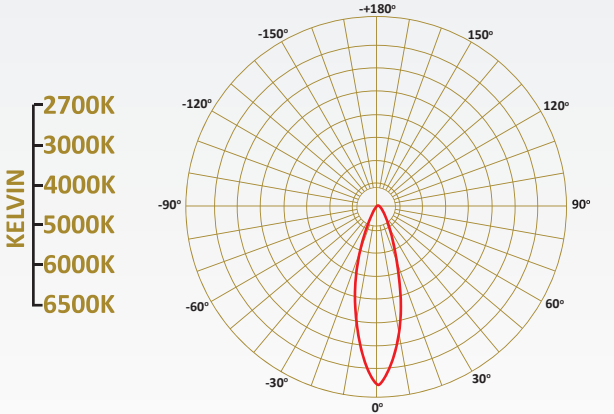

85~265V
50/60HZ



Ceiling-Surface

The Forza ceiling light allow the most flexibility in a lighting design with 350 degrees of movement freedom. The high efficiency LED system permits to deliver excellent performance while saving energy. High quality materials ensure the long working life span, is a warranty in term of weather resistance. The Forza Ceiling Light is available in black or white finish with three different installation options: track installation, ceiling recessed installation, ceiling surface installation.

HOUSING: Die Cast Aluminium with Powder Coated

DIFFUSER: Tempered Frosted Glass or Polycarbonate PMMA Diffuser




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	LED-Qty	Dimension
PLF255012	12W	1200lm	9Pcs	Ø85x98h
PLF255024	24W	2400lm	9Pcs	Ø135x102h

Technical Drawings

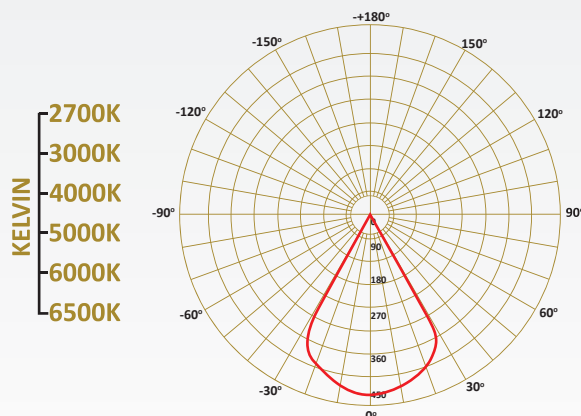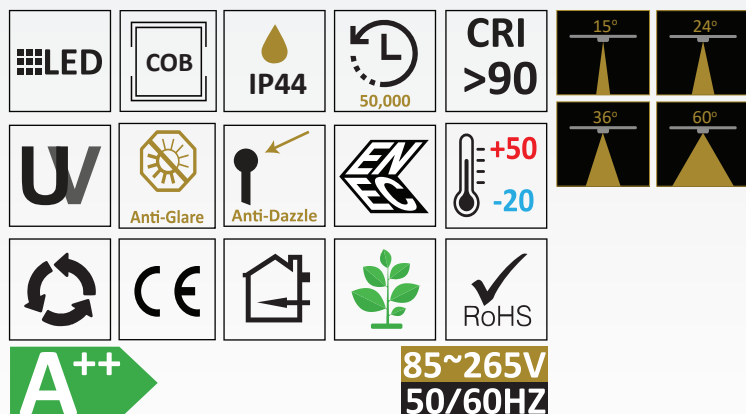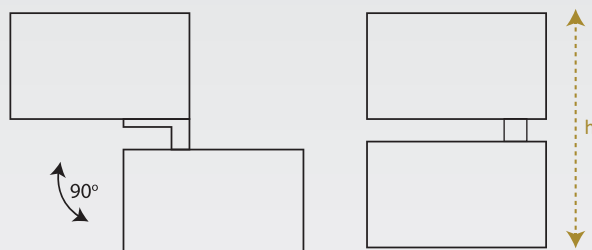



— Ceiling-Surface

The Giaree ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. High quality materials ensure the long working life span, is a warranty in term of weather resistance. The Giaree Ceiling Light are the character of design, determined with pure die cast aluminium. Best applications for the outdoor ceilings, anywhere you want to add a classy touch.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Tempered Clear Glass

REFLECTOR: Anodized Aluminium





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	LED-Qty	Dimension
PLG257016	16W	1920lm	9Pcs	Ø155x250h
PLG257011	11W	1320lm	9Pcs	Ø155x250h
PLG257026	26W	3120lm	1Pcs	Ø155x250h
PLG258003	3.5W	420lm	3Pcs	Ø100x170h
PLG258010	10W	1200lm	1Pcs	Ø100x170h

Technical Drawings

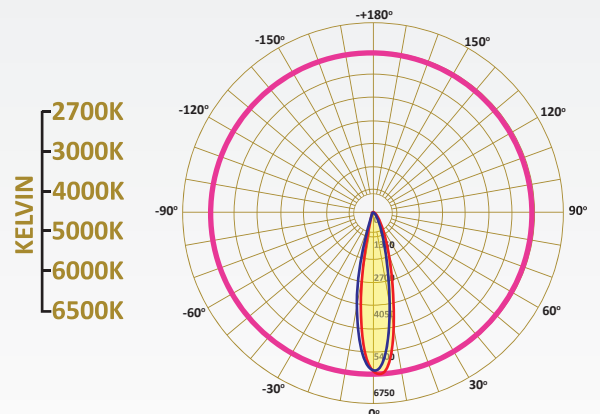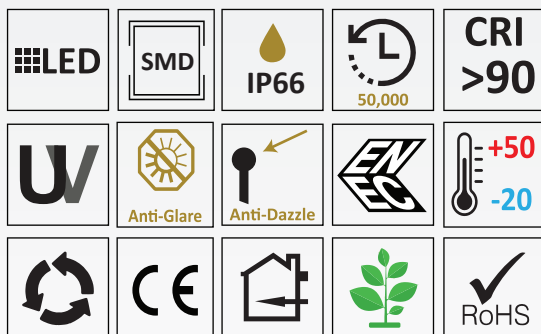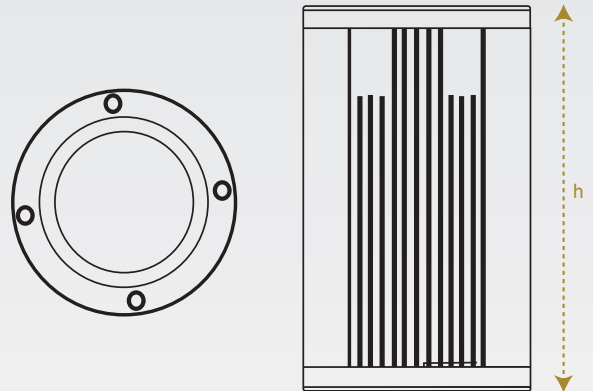



— Ceiling-Surface

The Leto ceiling light allow the most flexibility in a lighting design. Fashion and captivating design and a strong personality suitable for track installation. The feature of this item is its emitted light, which is coming both from the centre and around corners. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. Leto Ceiling Lights applications are to illuminate shop windows and retail spaces, private home rooms or hotel rooms.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Clear Tempered Glass





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLL256010	10W	1020lm	Ø105x115h
PLL256015	15W	1530lm	Ø105x115h

Technical Drawings

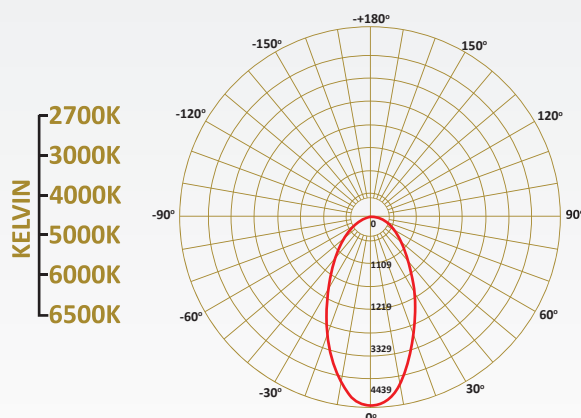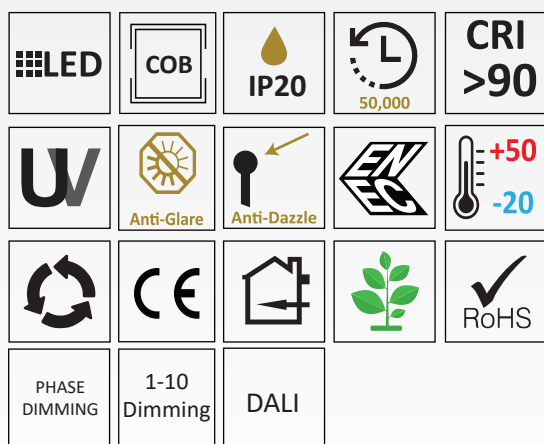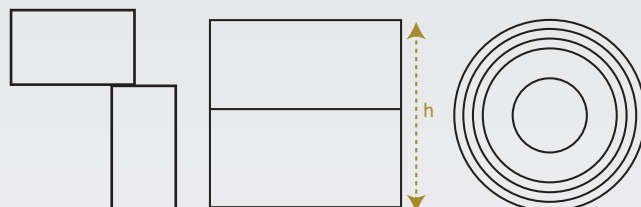

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER
TRIDONIC PHILIPS SHARP
OSRAM G-TI LEDVANCE BRIDGELUX

LED CHIP
PHILIPS CREE SAMSUNG CITIZEN



Ceiling-Surface

The Marte ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. These items can be used in the applications like shops, hotels, home, offices, restaurants and supermarkets or to replace any surface fixture application. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Tempered frosted glass or polycarbonate PMMA diffuser




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLM219010	10W	1200lm	Ø114x32h
PLM220016	16W	1920lm	Ø168x32h
PLM221024	24W	2880lm	Ø211x34h

Technical Drawings

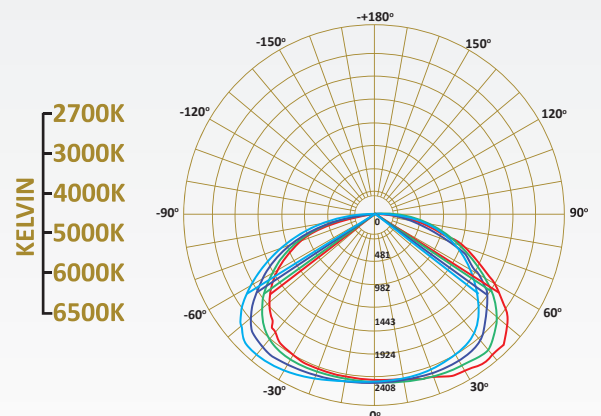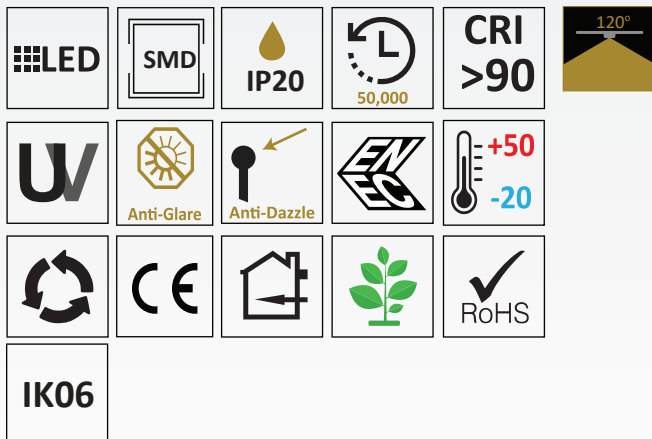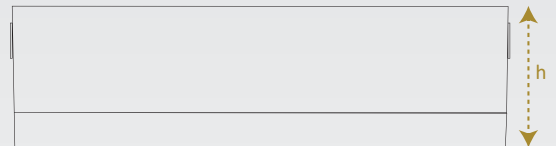



— Ceiling-Surface

The Marte Quadro ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. These items can be used in the applications like shops, hotels, home, offices, restaurants and supermarkets or to replace any surface fixture application. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Tempered frosted glass or polycarbonate PMMA diffuser




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLM222010	10W	1200lm	95x95x33h
PLM223016	16W	1920lm	145x145x33h
PLM224024	24W	2880lm	200x200x38h

Technical Drawings

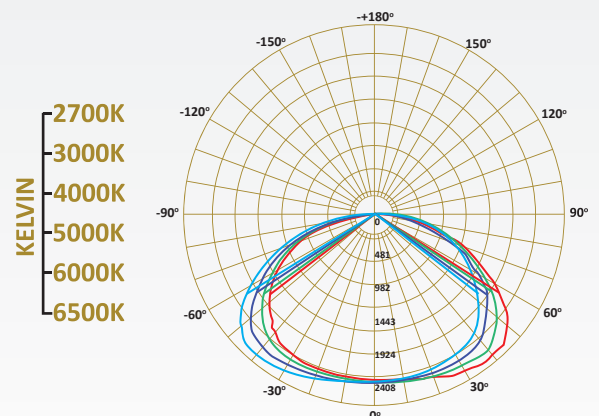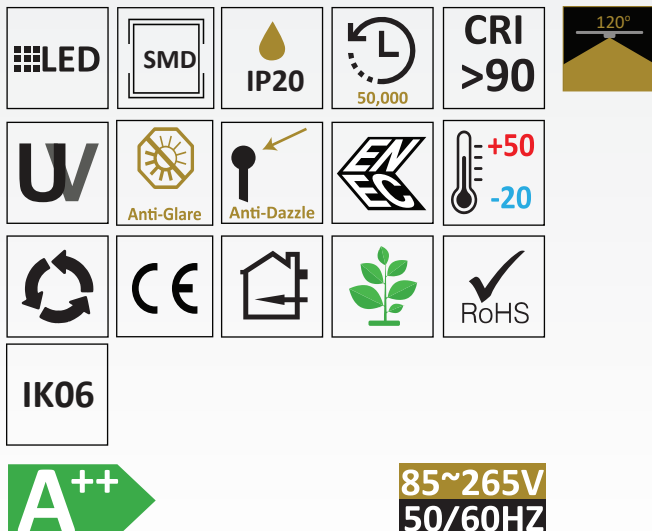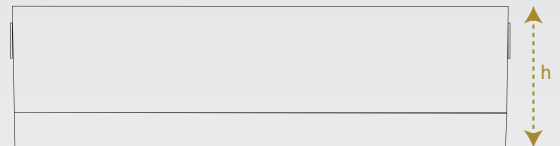



Ceiling-Surface

The Mascali ceiling light allow the most flexibility in a lighting design. The low glare effect ensures a comfortable light effect for the human eye. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. The Mascali Ceiling Light are the character of design, determined with pure die cast aluminium. Its applications are bar, restaurants, museum, art galleries.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Tempered Clear Glass

REFLECTOR: Anodized Aluminium




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications


Item Code	Power	Lumen	Dimension
PLM259020	20W	2000lm	Ø80x125x175h
PLM259025	25W	2500lm	Ø80x125x175h
PLM259030	30W	3000lm	Ø80x125x175h
PLM260035	35W	3500lm	Ø96x195x197h
PLM260040	40W	4000lm	Ø96x195x197h
PLM260050	50W	5000lm	Ø96x195x197h

Technical Drawings

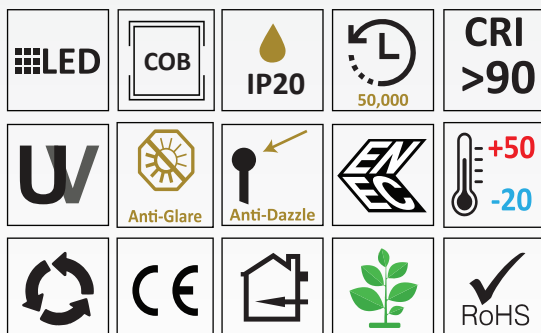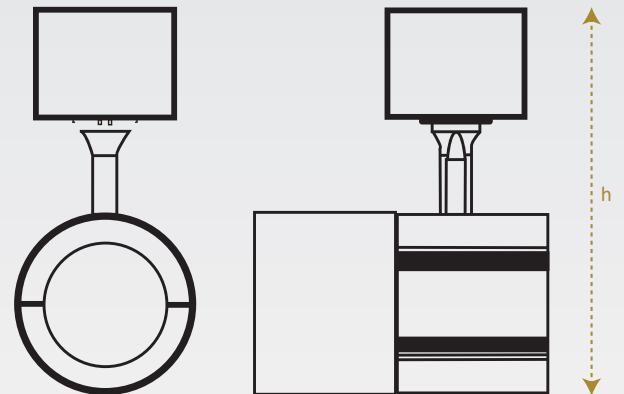

85~265V
50/60HZ

KELVIN
2700K
3000K
4000K
5000K
6000K
6500K

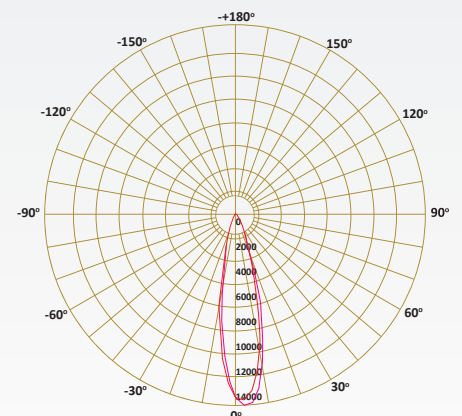

CEILING LIGHTS

LED DRIVER
TRIDONIC PHILIPS SHARP
OSRAM GTI MW BRIDGELUX SAMSUNG CITIZEN

LED CHIP
PHILIPS CREE



— Ceiling-Surface

The Mela ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. The item is available with suspension or ceiling surface mounting kit, to match all the requirements of style. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminum

DIFFUSER: Tempered Frosted Glass or Polycarbonate PMMA Diffuser

REFLECTOR: Polished Aluminum





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLM253012	12W	1236lm	Ø80x105h
PLM253020	20W	2060lm	Ø100x150h
PLM253030	30W	3090lm	Ø150x160h

Technical Drawings

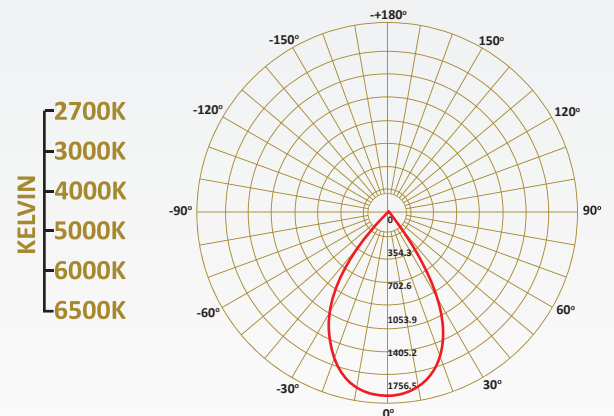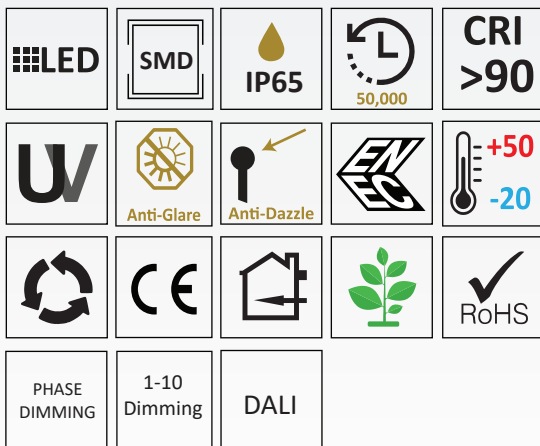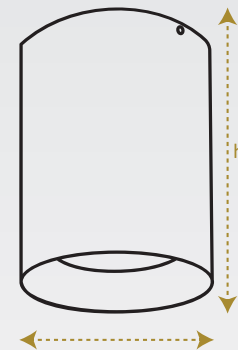


85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER
TRIDONIC PHILIPS SHARP
OSRAM GTI LED CHIP
PHILIPS CREE SAMSUNG CITIZEN

MELA QUADRO

CEILING LIGHTS

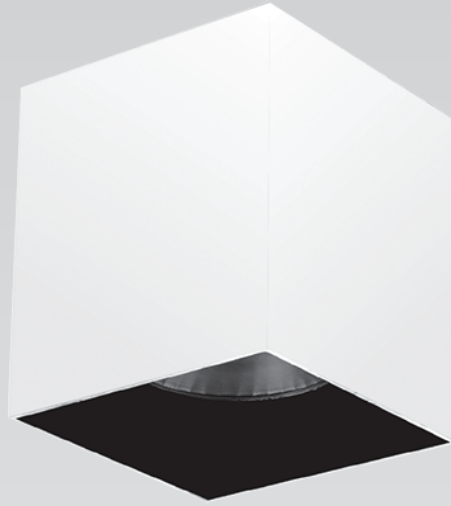

Ceiling-Surface

The Mela Quadro ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. The item is available with suspension or ceiling surface mounting kit, to match all the requirements of style. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminum

DIFFUSER: Tempered Frosted Glass or Polycarbonate PMMA Diffuser

REFLECTOR: Polished Aluminum





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLM254012	12W	1236lm	80x80x105h
PLM254020	20W	2060lm	100x100x150h
PLM254030	30W	3090lm	150x150x160h

Technical Drawings

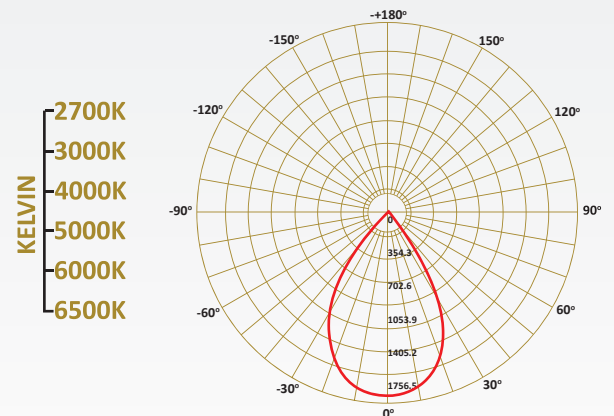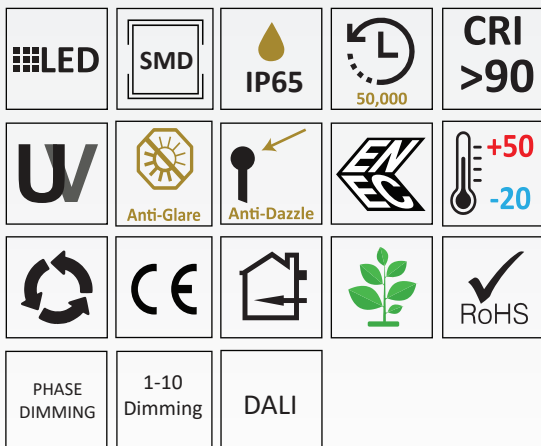

CEILING LIGHTS





— Ceiling-Surface

The Meri ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Vandal resistant and V2 self extinguishing polycarbonate UV stabilized

DIFFUSER: Anti Glare with UV Polycarbonate Diffuser

REFLECTOR: Polished Aluminum




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLL225012	12W	1500lm	Ø350x50h
PLL225018	18W	2250lm	Ø350x50h
PLL225024	24W	3000lm	Ø350x50h


Technical Drawings

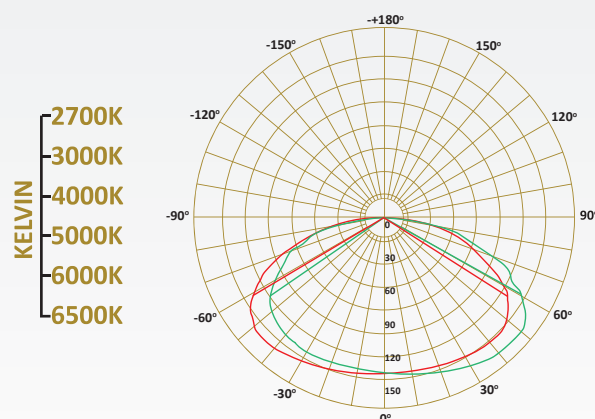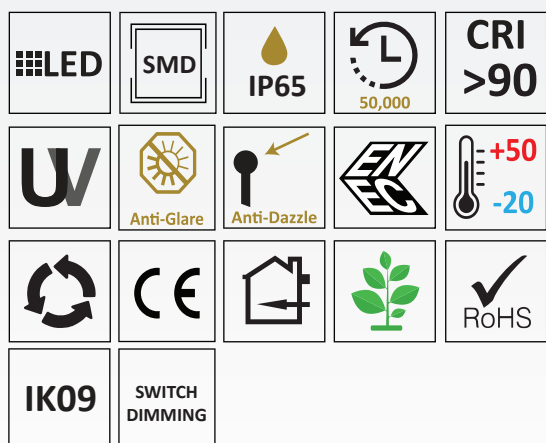

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN

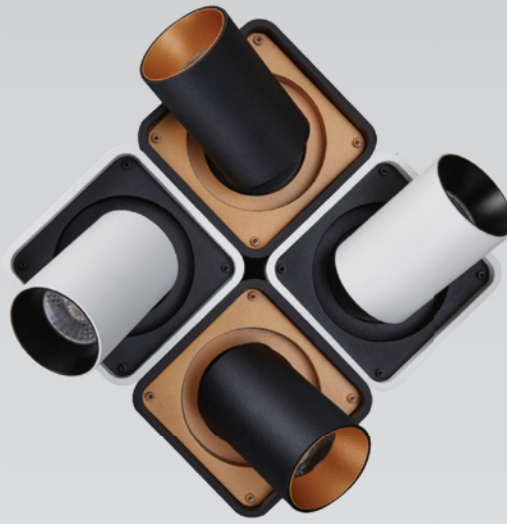

— Ceiling-Surface

The Naxos ceiling light allow the most flexibility in a lighting design. The low glare effect ensures a comfortable light effect for the human eye. The feature of this item is its emitted light, which is coming both from the centre and around corners. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. The Naxos Ceiling Lights applications are to illuminate shop windows and retail spaces, private home rooms or hotel rooms.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Opal Polycarbonate

REFLECTOR: Polished Aluminium





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLN218010	10W	1010lm	Ø60x90x168h

Technical Drawings

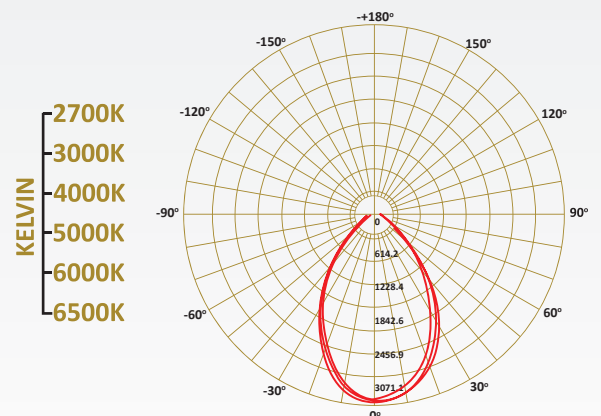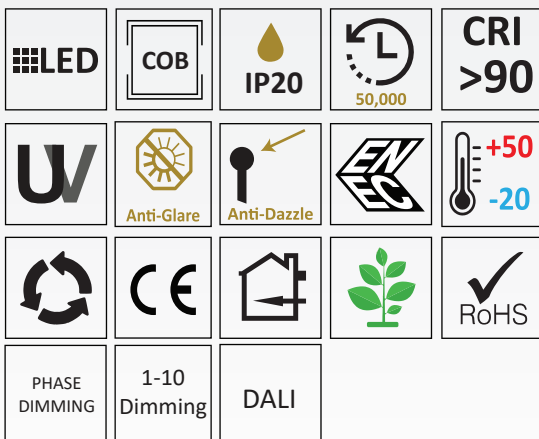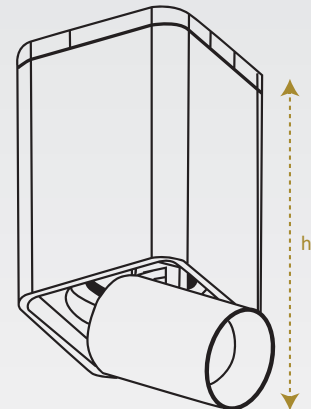



— Ceiling-Surface

The Novara ceiling light has high resistance body tested in IP54 and IP65. It's decorative ceiling light with all the features/characteristics outside. IP65 means the body resistance is best suited for hard metrological conditions or humid weather. The finishing of the item is perfect in every detail with clear diffuser and anodized aluminum reflector. Suitable for commercial and residential applications indoor/outdoor like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminum in choice of RAL Colours Powder Coated

DIFFUSER: Tempered Clear Glass Diffuser

REFLECTOR: Anodized Aluminum





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLN246006	6W	660lm	Ø90x113h
PLN247008	8W	880lm	Ø108x150h
PLN248012	12W	1320lm	Ø145x120h
PLN248018	18W	1980lm	Ø145x120h

Technical Drawings

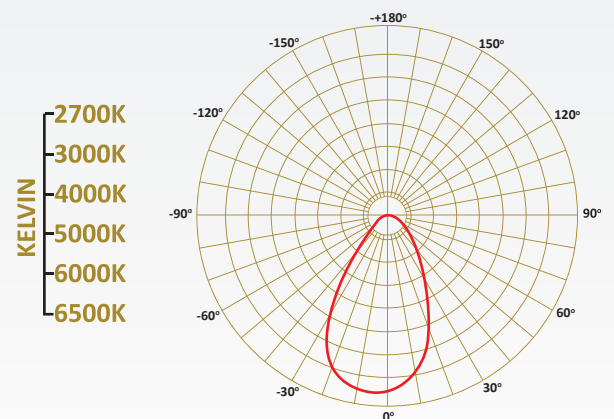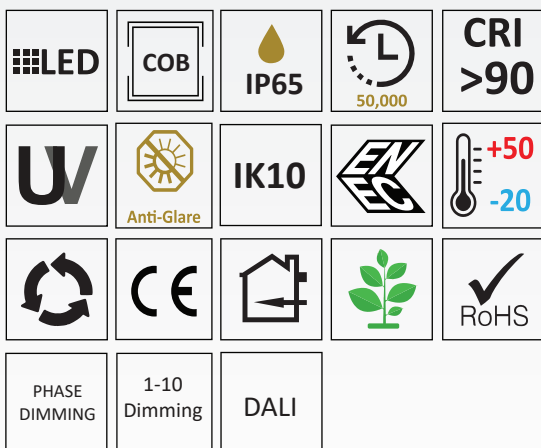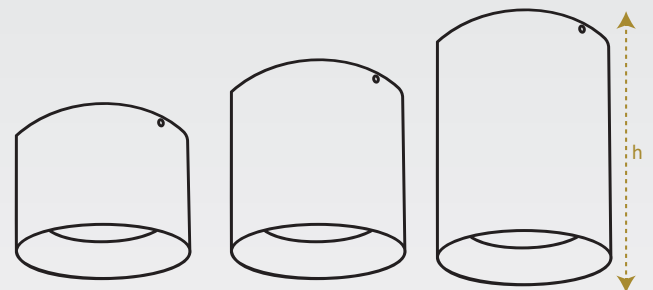

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, SAMSUNG, BRIDGELUX, CITIZEN



— Ceiling-Surface

The Novara Quadro ceiling light has high resistance body tested in IP54 and IP65. It's decorative ceiling light with all the features/characteristics outside. IP65 means the body resistance is best suited for hard metrological conditions or humid weather. The finishing of the item is perfect in every detail with clear diffuser and anodized aluminum reflector. Suitable for commercial and residential applications indoor/outdoor like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminum in choice of RAL Colours Powder Coated

DIFFUSER: Tempered Clear Glass Diffuser

REFLECTOR: Anodized Aluminum





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLN249006	6W	660lm	86x86x115h
PLN250008	8W	880lm	118x118x120h
PLN251012	12W	1320lm	150x150x120h
PLN251018	18W	1980lm	150x150x120h

Technical Drawings

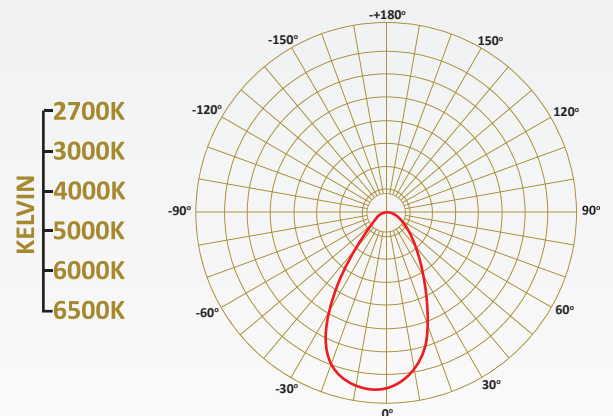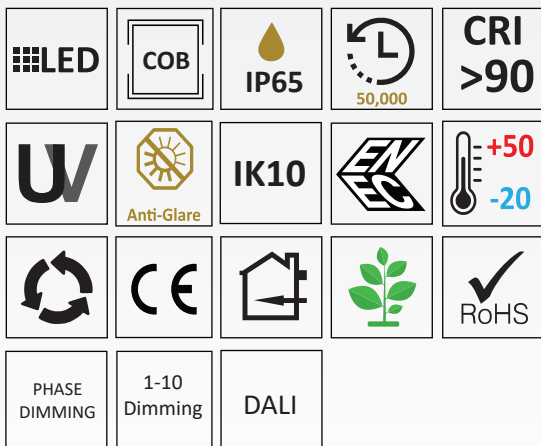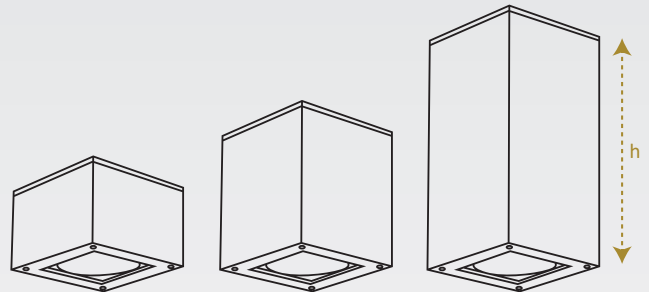

85~265V
50/60HZ

CEILING LIGHTS





— Ceiling-Surface

The Revi ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Vandal resistant and V2 self extinguishing polycarbonate UV stabilized

DIFFUSER: Anti-glare with UV polycarbonate diffuser

REFLECTOR: Polished Aluminum



LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLR228012	12W	1440lm	Ø156x36h
PLR229018	18W	2100lm	Ø181x36h
PLR230025	25W	3000lm	Ø231x36h

Technical Drawings

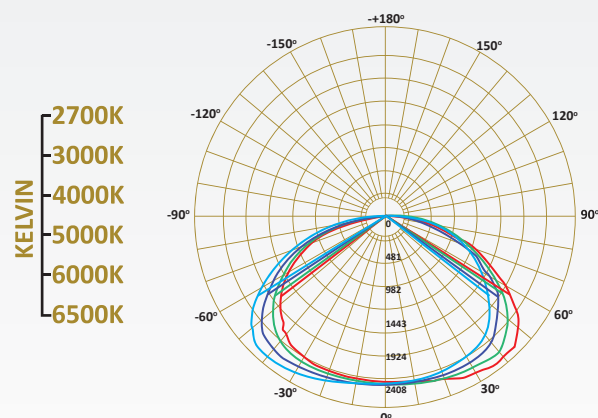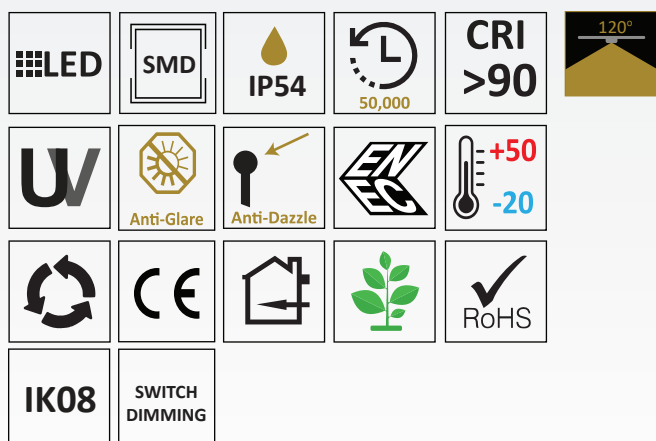



— Ceiling-Surface

The Revi Quadro ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Clear Tempered Glass




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLR232012	12W	1440lm	156x156x36h
PLR233018	18W	2100lm	181x181x36h
PLR234025	25W	3000lm	231x231x36h

Technical Drawings

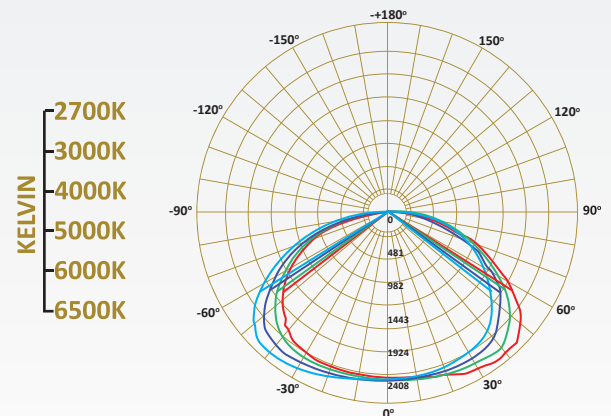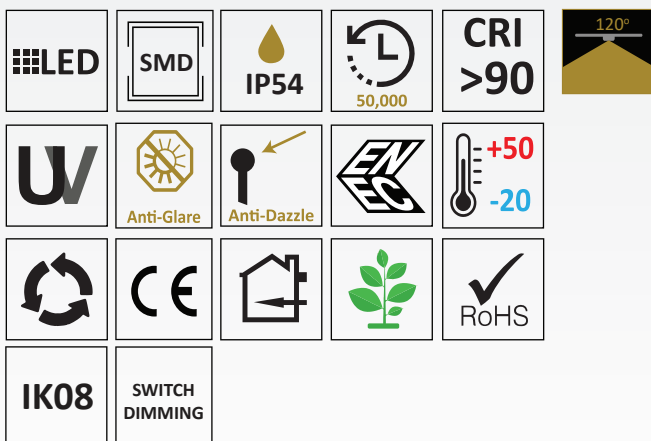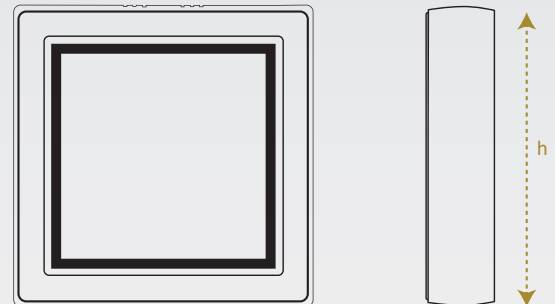


85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER
TRIDONIC PHILIPS SHARP
OSRAM GTI MWM BRIDGELUX SAMSUNG CITIZEN

LED CHIP
PHILIPS CREE

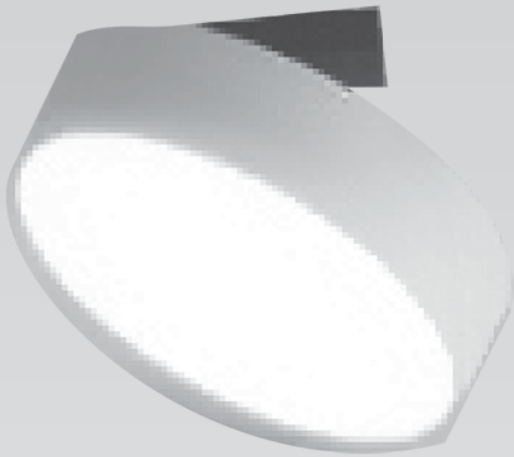


Ceiling-Surface

The Taormina ceiling light allow the most flexibility in a lighting design. The low glare effect ensures a comfortable light effect for the human eye. The feature of this item is its emitted light, which is coming both from the centre and around corners. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. This ceiling Lights applications are to illuminate shop windows and retail spaces, private home rooms or hotel rooms.

- HOUSING:** Die Cast Aluminium with Choice of RAL Colour Powder Coated
- DIFFUSER:** Opal Polycarbonate
- REFLECTOR:** Polished Aluminium
- LED:** Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications			
Item Code	Power	Lumen	Dimension
PLT215018	18W	1980lm	Ø160x80h
PLT216025	25W	2750lm	Ø260x90h
PLT217035	35W	3850lm	Ø350x90h

Technical Drawings

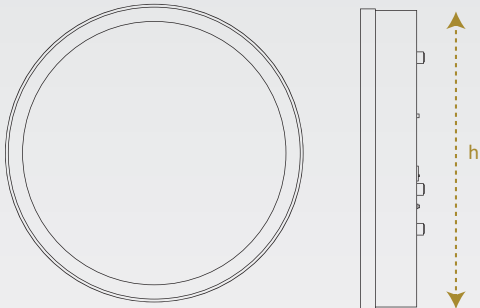

LED

SMD

IP44

50,000

CRI >90

W

Anti-Glare

Anti-Dazzle


+50
-20

CE

RoHS

SWITCH DIMMING

IK08

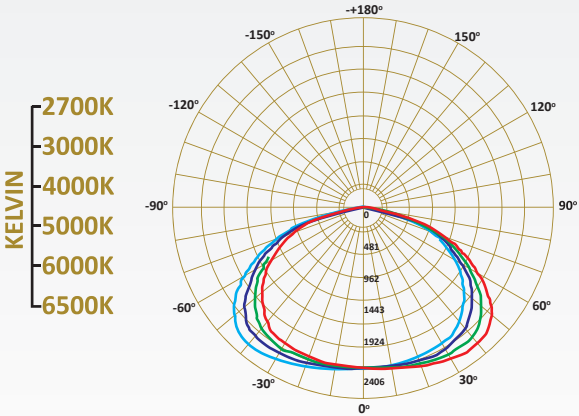

85~265V
50/60HZ




Ceiling-Surface

The Vivaldi ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

- HOUSING:** Vandal resistant and V2 self extinguishing polycarbonate UV stabilized
- DIFFUSER:** Anti-glare with UV polycarbonate diffuser
- REFLECTOR:** Polished Aluminum
- LED:** Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications			
Item Code	Power	Lumen	Dimension
PLV207012	12W	1330lm	Ø250x40h
PLV208018	18W	1995lm	Ø300x40h
PLV209025	25W	2775lm	Ø350x40h
PLV210030	30W	3330lm	Ø400x40h

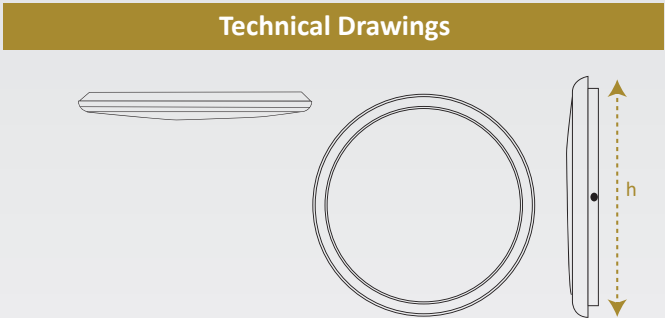

LED

SMD

IP65

50,000

CRI >90

120°

UV

Anti-Glare

Anti-Dazzle

EN

+50
-20

Recycling

CE


RoHS


IK09

SWITCH DIMMING



85~265V
50/60HZ

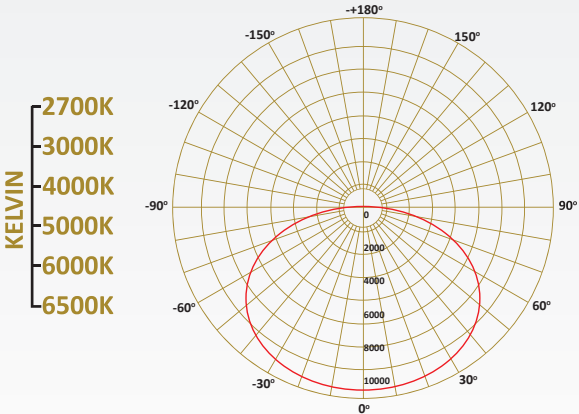

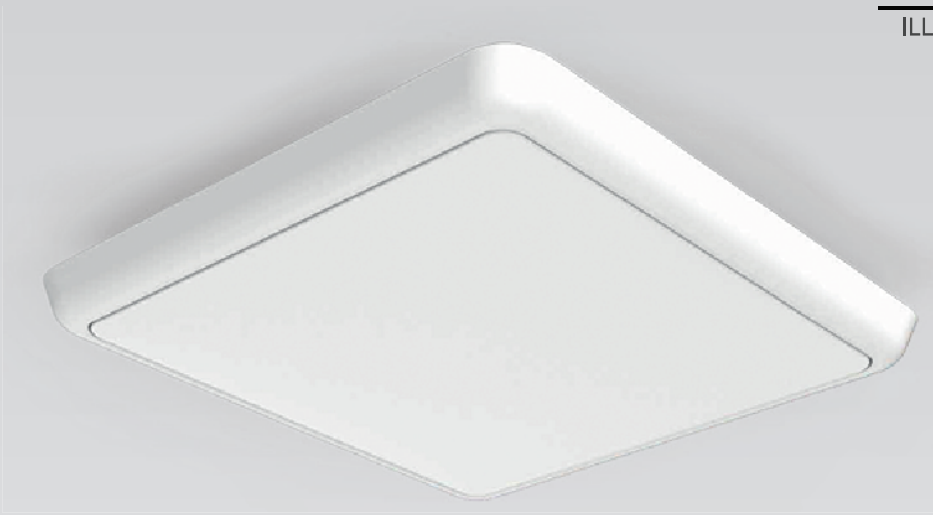


Ceiling-Surface

The Vivaldi Quadro ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

- HOUSING:** Vandal resistant and V2 self extinguishing polycarbonate UV stabilized
- DIFFUSER:** Anti-glare with UV polycarbonate diffuser
- REFLECTOR:** Polished Aluminum
- LED:** Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications			
Item Code	Power	Lumen	Dimension
PLV211012	12W	1330lm	250x250x40h
PLV212018	18W	1995lm	300x300x40h
PLV213025	25W	2775lm	350x350x40h
PLV214030	30W	3330lm	400x400x40h

Technical Drawings

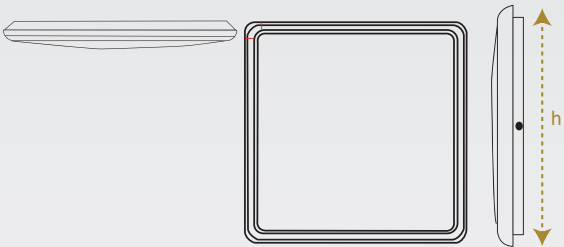

LED

SMD

IP65

50,000

CRI >90

120°

UV

Anti-Glare

Anti-Dazzle

EN


+50
-20

IK09

SWITCH DIMMING

CE

RoHS

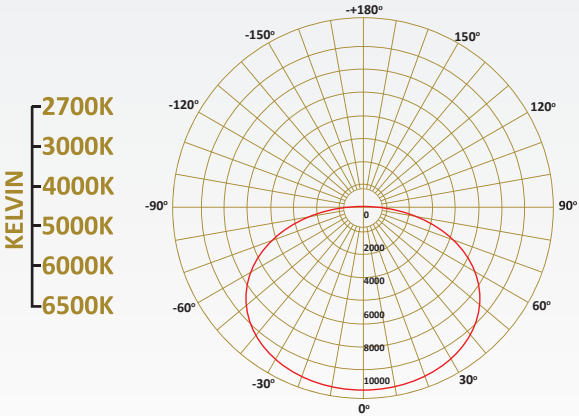

85~265V
50/60HZ




Ceiling-Surface

The Zido ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The color temperature and color rendering index are maintained constant through the lifespan of these products, guaranteeing a consistent light quality. We provide a wide range of LED downlight from 3 to 10 inch in distinguished design. These items can be used in the applications like shops, hotels, home, offices, restaurants and supermarkets or to replace any surface fixture application.

- HOUSING:** Die Cast Aluminium with Choice of RAL Colour Powder Coated
- DIFFUSER:** Clear Tempered Glass
- LED:** Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications			
Item Code	Power	Lumen	Dimension
PLZ202005	5W	1020lm	Ø68x87h
PLZ203010	10W	1530lm	Ø87x88h
PLZ204015	15W	1020lm	Ø108x108h
PLZ205020	20W	1530lm	Ø128x128h
PLL206025	25W	1020lm	Ø148x148h

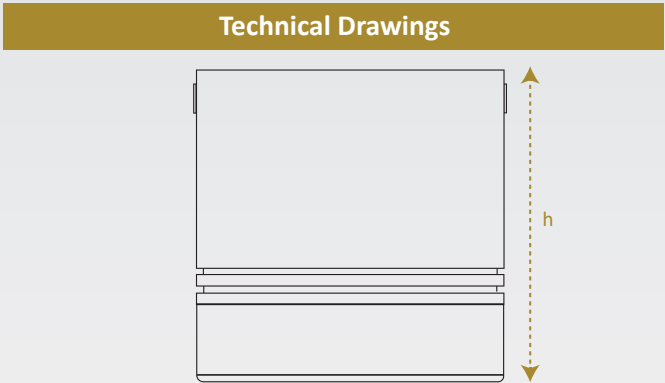

LED

SMD

IP20

50,000

CRI >90

120°

UV

Anti-Glare

Anti-Dazzle

EN

+50
-20


PHASE DIMMING

CE

1-10 Dimming

DALI

RoHS

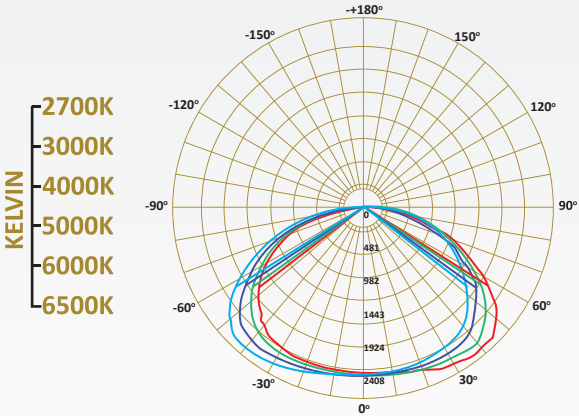

85~265V
50/60HZ



Metropolitan City of Rome Capital, Rome, Italy
info@polaluce.com | www.polaluce.com