



Recessed

Minimal appearance and one-piece structure design, looks elegant and generous. Professional designed light distribution offers you soft and comfortable light. Antiglare design, UGR <19, also available with anti-fog special glass. The possible applications are a multitude. Antiglare design, soft and comfortable light.

**HOUSING:** Die-cast aluminium, patent heat radiation structure, Upcast air design for good heat dissipation


**REFLECTOR:** Anodized aluminium

**LED:** Reducy Energy Consumption with L80/B10/F10





**AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

### Technical Specifications

Item Code	Power	Lumen	Dimension	Hole
PLB38010	10W	1200 lm	Ø90 x 112 h	Ø75
PLB38015	15W	1800 lm	Ø90 x 112 h	Ø75



### Technical Drawings

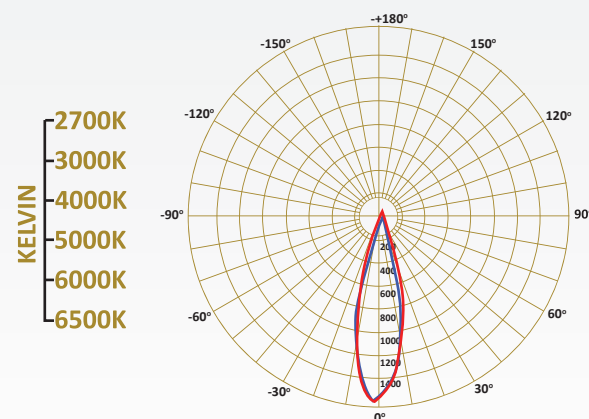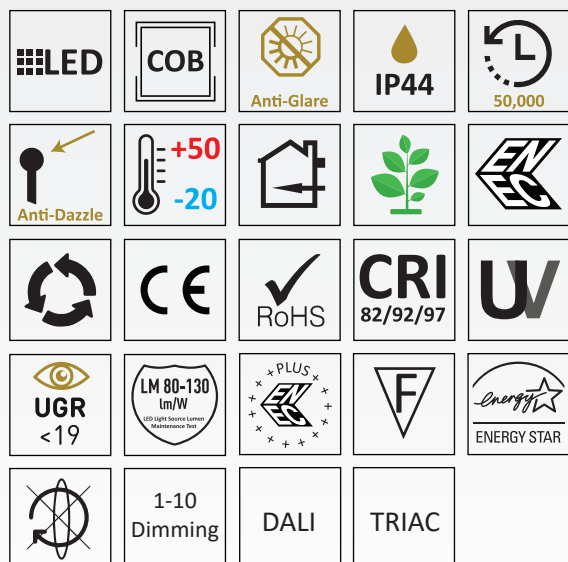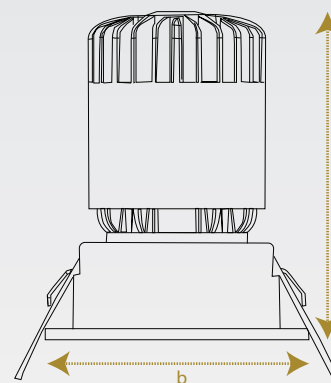

85~265V  
50/60HZ

SPOT LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN