 Recessed

Suitable for installation in false ceiling, with the body in die cast aluminium which gives to the product that look of tough and professional at the same time, the luminaire is pure efficiency. The high quality Led system ensures an elevated luminous flux while paying attention to environment: the energy saving with this product is up to 90% if compared with the old halogen. The high definition optics, meticulously studied and made of metallized highly resistant thermoplastic material, and the integrated black anti-glare screen are the warranty of a really professional light effect: pure, uniform and highly visual comfortable. Integrated black anti-glare screen are the warranty of a really professional light effect: pure, uniform and highly visual comfortable.

HOUSING: Die cast aluminium with PVC coated and choice of RAL colors

DIFFUSER: PMMA Special Lens

LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE: 50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)





Technical Specifications

Item Code	Power	Lumen	Dimension	Hole
PLL69002	2W	240lm	42x42x49h	45x45
PLL70004	4W	480lm	42x72x49h	75x45
PLL71010	10W	1200lm	42x115x49h	120x45
PLL72020	20W	2400lm	42x277x49h	280x45
PLL73030	30W	3600lm	42x410x49h	420x45

Finish

- ☐ White
- ☐ Silver
- ☒ Black

Technical Drawings

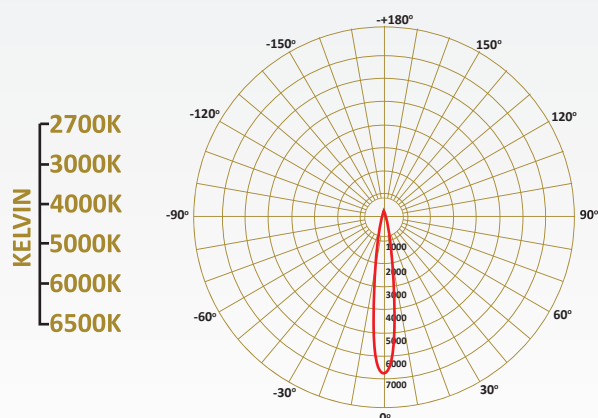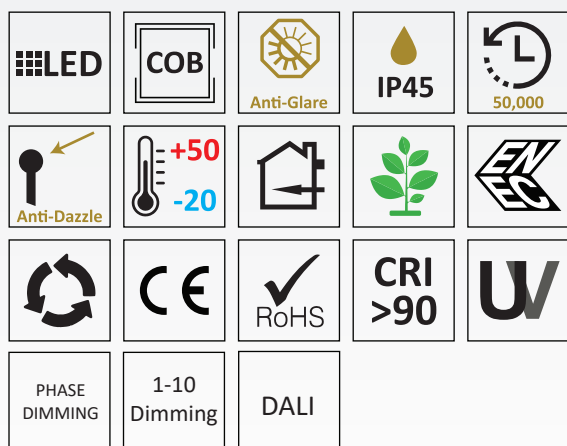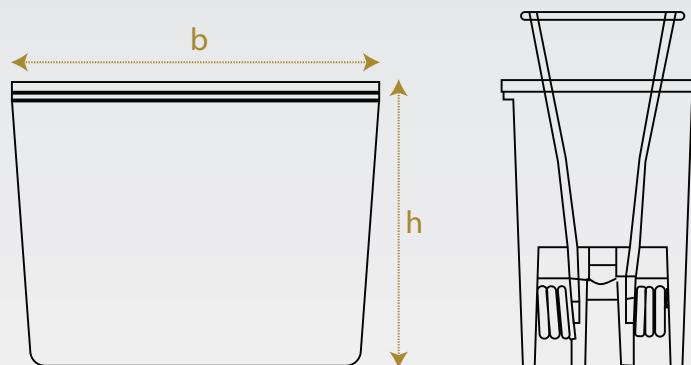

85~265V
50/60HZ

SPOT LIGHTS

LED DRIVER
TRIDONIC PHILIPS SHARP PHILIPS CREE
OSRAM G-TI BRIDGELUX SAMSUNG CITIZEN