



Down Recessed

This Albaro downlight is Stylish and extremely elegant in its finish. With a choice between special diffuser and high power lens to provide the chance to personalized the characteristics of the light output. Compact and curved in its design, the fixture has a really professional look and maximum flexibility in application. The extreme attention to every detail in the powder coating finishing is the final touch of beauty and reliability. The high efficiency of the LED source ensures high performances and low consumptions. The applications of this product are many, but it is mainly recommended because of the classic square shape for shops, shop windows, hotels and everywhere there is need of an accent light.

HOUSING: Die Cast Aluminium with Powder Coating in Choice of RAL Colors

DIFFUSER: Indirect Light





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension	Hole
PLA2496T	8.9W	756.5lm	Ø110x34h	Ø94
PLA2496Q	8.9W	756.5lm	Ø110x34h	Ø94
PLA2496S	8.9W	756.5lm	Ø110x34h	Ø94
PLA2497T	11.9W	1011.5lm	Ø150x42h	Ø133
PLA2497Q	11.9W	1011.5lm	Ø150x42h	Ø133
PLA2497S	11.9W	1011.5lm	Ø150x42h	Ø133
PLA2498T	17.8W	1513lm	Ø180x48h	Ø155
PLA2498Q	17.8W	1513lm	Ø180x48h	Ø155
PLA2498S	17.8W	1513lm	Ø180x48h	Ø155

Technical Drawings

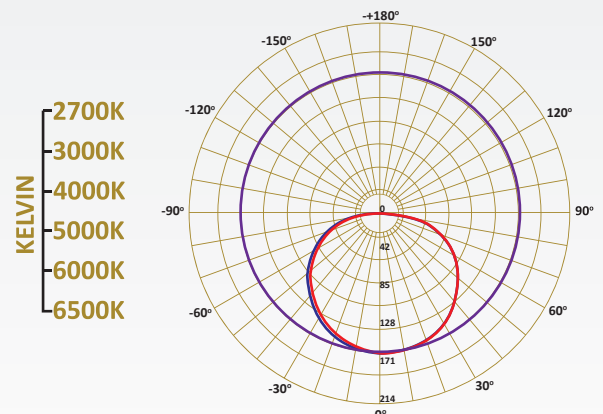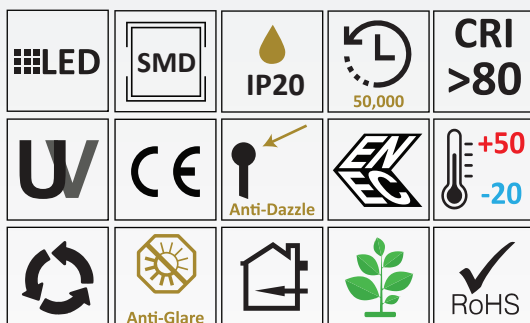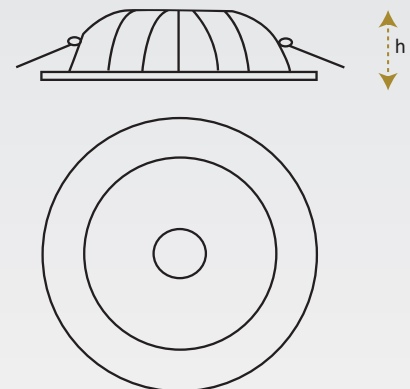

85~265V
50/60HZ

DOWN LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN