




Suspended

Opal Diffuser, Professionally Linear and Modular system illuminates the work area without tiring the eyes. It ensures an excellent uniformity and high luminous efficacy.

- HOUSING:** Die Cast Aluminium
DIFFUSER: Spotlights
LED: Reducy Energy Consumption with L80/B10/F10
AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)
BODY COLOR: White Black Grey Yellow Green Orange

Technical Specifications				
Item Code	Power	Lumen	Dimension	Light
PLA316030	30W	3600lm	1133x34x100	Direct
PLA316015	30+15W	3600+1800lm	1133x34x100	Direct/Indirect

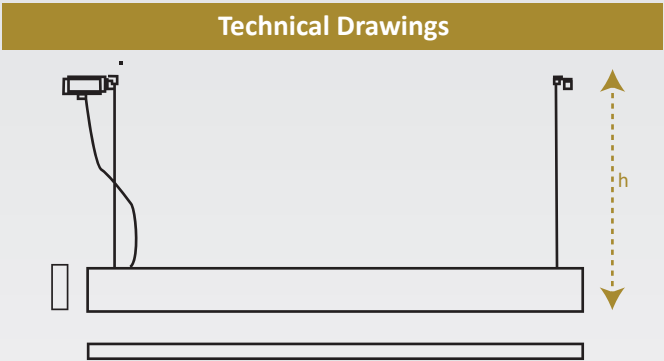

LED

SMD

IP20

50,000

CRI >80 / >90

15°

Direct

Indirect

UW

Anti-Glare


Anti-Dazzle

EN

+50 / -20

RoHS

UGR <19

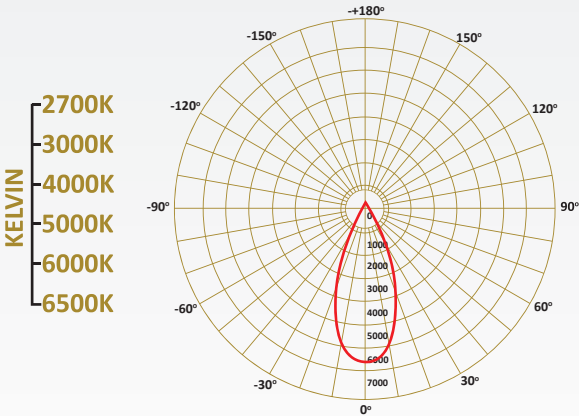

85~265V
50/60HZ