




Suspended

Opal Diffuser, Professionally Linear and Modular system illuminates the work area without tiring the eyes. It ensures an excellent uniformity and high luminous efficacy.

- HOUSING: Die Cast Aluminium
- DIFFUSER: Spotlights
- LED: Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)
- BODY COLOR: White Black Grey Yellow Green Orange

Technical Specifications				
Item Code	Power	Lumen	Dimension	Light
PLA315030	30W	3600lm	1133x34x100	Direct
PLA315015	30+15W	3600+1800lm	1133x34x100	Direct/Indirect

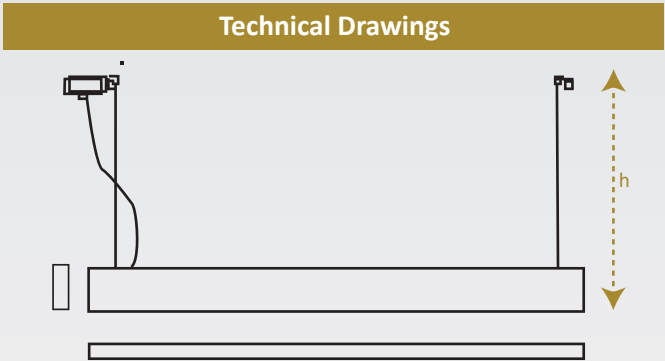

LED

SMD

IP20

50,000

CRI >80 / >90

Direct

Indirect

UW

Anti-Glare

Anti-Dazzle


EN

+50 -20

CE

RoHS

UGR <19

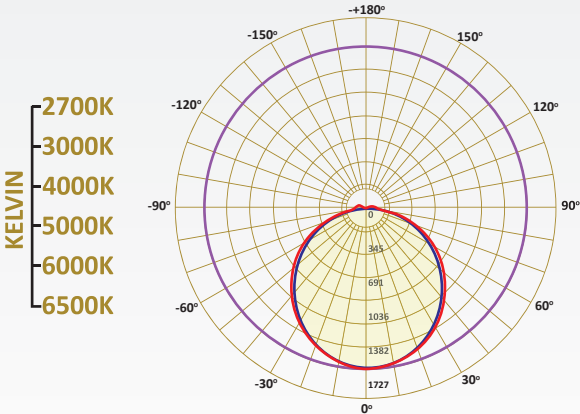

A++

85~265V
50/60HZ

SUSPENDED LIGHTS

LED DRIVER

TRIDONIC

PHILIPS

SHARP

LED CHIP

PHILIPS

CREE

OSRAM

GTI

BRIDGELUX

SAMSUNG

CITIZEN