



Down Recessed

This Carlo downlight is directable vertically of 30° built along minimalist and fascinating lines. The energy saving and the reasonable price are just two reason more to choose an item which is pure functionality. The extreme attention to every detail in the powder coating finishing is the final touch of beauty and reliability. The high efficiency of the LED source ensures high performances and low consumptions. Available in different sizes and possible applications of this product are many, but it is mainly recommended for shops, shop windows, hotels and everywhere there is need of an accent light.

**HOUSING:** Die Cast Aluminium with Powder Coating in Choice Color of RAL Colors

**DIFFUSER:** Tempered Glass

**REFLECTOR:** Anodized Aluminium



**LED:** Reducy Energy Consumption with L80/B10/F10

**AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

#### Technical Specifications

Item Code	Power	Lumen	Dimension	Hole
PLC2489T	6.2W	744lm	85x85x70h	Ø75
PLC2489Q	6.2W	744lm	85x85x70h	Ø75
PLC2490T	11.8W	1416lm	100x100x87h	Ø85
PLC2490T	11.8W	1416lm	100x100x87h	Ø85
PLC2491T	19.2W	2304lm	140x140x105h	Ø115
PLC2491Q	19.2W	2304lm	140x140x105h	Ø115
PLC2492T	29.4W	3528lm	175x175x115h	Ø150
PLC2492T	29.4W	3528lm	175x175x115h	Ø150

#### Technical Drawings

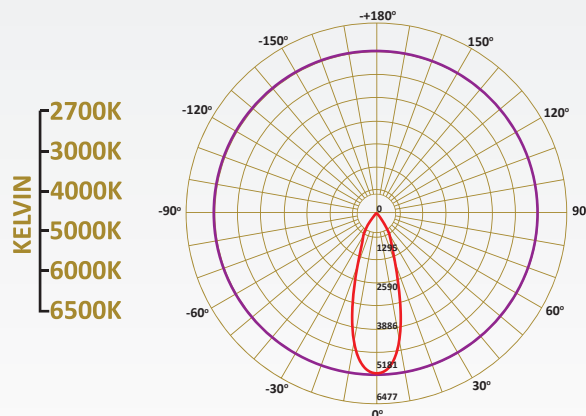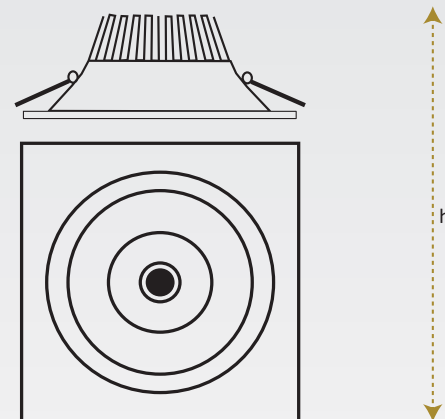

85~265V  
50/60HZ

DOWN LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN