




Down Recessed

This Corte downlight is directable vertically of 30° built along minimalist and fascinating lines. The energy saving and the reasonable price are just two reason more to choose an item which is pure functionality. The extreme attention to every detail in the powder coating finishing is the final touch of beauty and reliability. The high efficiency of the LED source ensures high performances and low consumptions. Available in different sizes and possible applications of this product are many, but it is mainly recommended for shops, shop windows, hotels and everywhere there is need of an accent light.

- HOUSING:** Die Cast Aluminium with Powder Coating in Choice Color of RAL Colors
DIFFUSER: Tempered Glass
REFLECTOR: Anodized Aluminium
LED: Reducy Energy Consumption with L80/B10/F10
AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications				
Item Code	Power	Lumen	Dimension	Hole
PLC2485T	6.9W	828lm	Ø85x70h	Ø75
PLC2485Q	6.9W	828lm	Ø85x70h	Ø75
PLC2486T	11.4W	1368lm	Ø100x87h	Ø85
PLC2486T	11.4W	1368lm	Ø100x87h	Ø85
PLC2487T	19.3W	2316lm	Ø140x105h	Ø115
PLC2487Q	19.3W	2316lm	Ø140x105h	Ø115
PLC2488T	29.7W	3564lm	Ø175x115h	Ø150
PLC2488T	29.7W	3564lm	Ø175x115h	Ø150

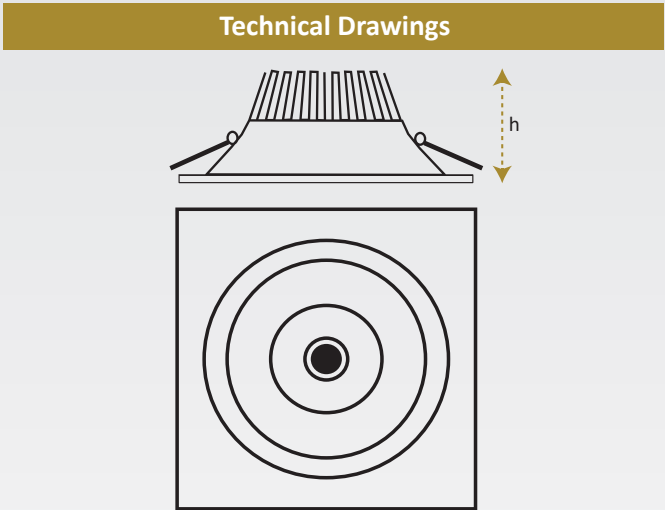

LED

COB

IP54

50,000

CRI >80

W

CE

Anti-Dazzle


ENEC

+50 -20

Anti-Glare

RoHS

CREE

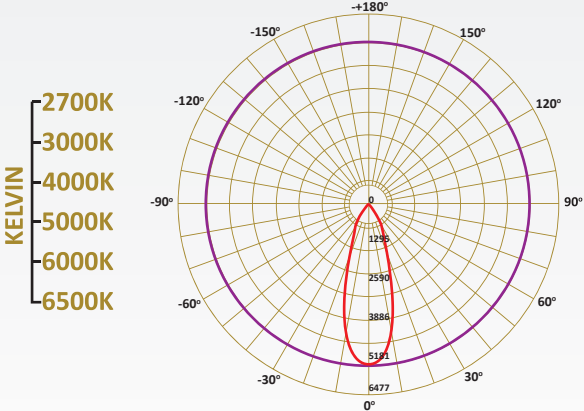

85~265V
50/60HZ

DOWN LIGHTS

LED DRIVER

TRIDONIC PHILIPS SHARP

LED CHIP

PHILIPS CREE OSRAM GTI MWM BRIDGELUX SAMSUNG CITIZEN