



— Ceiling-Surface

The Etneo ceiling light allow the most flexibility in a lighting design. The low glare effect ensures a comfortable light effect for the human eye. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. The Etneo Ceiling Lights both installation options come with 350 degree freedom movements and high power and efficiency LED system, to ensure qualitative performance of the light output and energy saving.

**HOUSING:** Die Cast Aluminium with Choice of RAL Colour Powder Coated

**DIFFUSER:** Opal Polycarbonate

**REFLECTOR:** Polished Aluminium





**LED:** Reducy Energy Consumption with L80/B10/F10

**AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

## Technical Specifications

Item Code	Power	Lumen	Dimension
PLE226012	12W	1200lm	Ø60x90x155h

## Technical Drawings

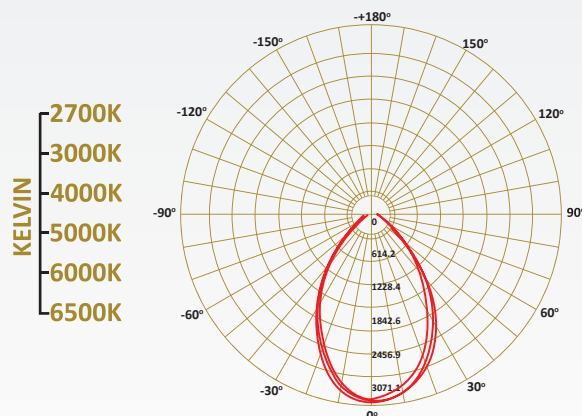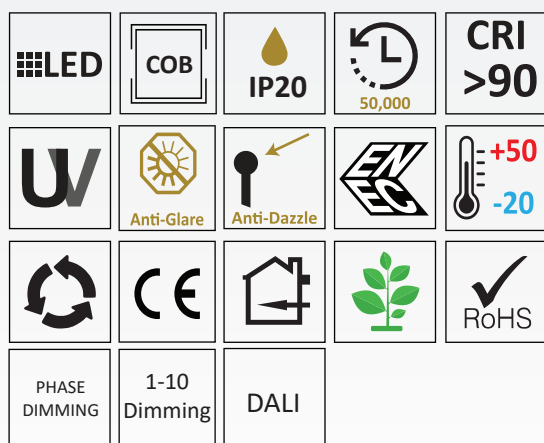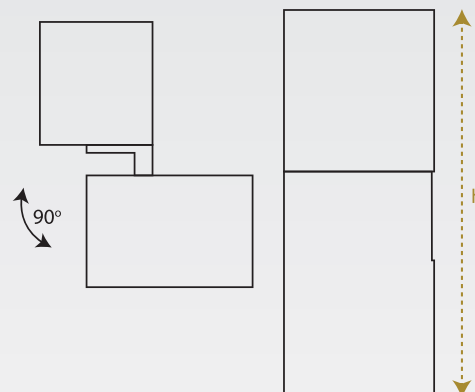

85~265V  
50/60HZ

CEILING LIGHTS