



— Ceiling-Surface

The Leto ceiling light allow the most flexibility in a lighting design. Fashion and captivating design and a strong personality suitable for track installation. The feature of this item is its emitted light, which is coming both from the centre and around corners. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. Leto Ceiling Lights applications are to illuminate shop windows and retail spaces, private home rooms or hotel rooms.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Clear Tempered Glass





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLL256010	10W	1020lm	Ø105x115h
PLL256015	15W	1530lm	Ø105x115h

Technical Drawings

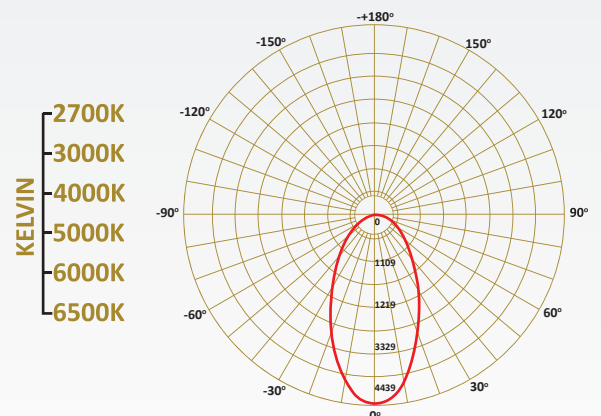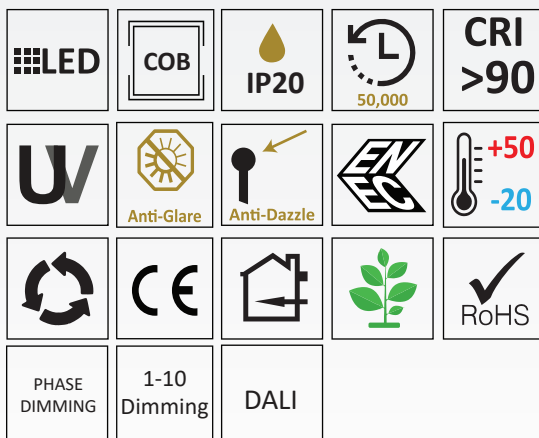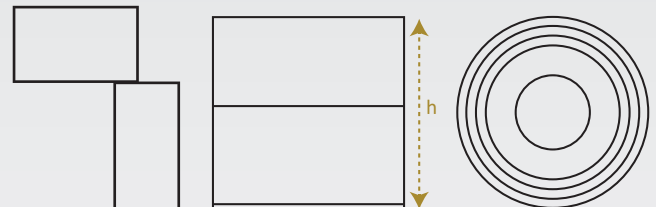

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER
TRIDONIC PHILIPS SHARP
OSRAM G-TI LEDVANCE BRIDGELUX SAMSUNG CITIZEN

LED CHIP
PHILIPS CREE