



 *Suspended*

Linea Punitnata with Prismatic diffuser, with best quality of light and visual comfort. This is an ideal choice for offices, libraries, classrooms and hospitals and other public buildings.

HOUSING: Die Cast Aluminium

DIFFUSER: Prismatic Anti-glare

LED: Reducy Energy Consumption with L80/B10/F10


AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

BODY COLOR:      


Technical Specifications

Item Code	Power	Lumen	Dimension	Light
PLL308015	15W	1800lm	601x74x102	Direct
PLL308022	22W	2640lm	881x74x102	Direct
PLL308030	30W	3600lm	1161x74x102	Direct
PLL308038	38W	4560lm	1441x74x102	Direct
PLL308045	45W	5400lm	1721x74x102	Direct
PLL308052	52W	6240lm	2001x74x102	Direct
PLL308060	60W	7200lm	2281x74x102	Direct
PLL309007	15+7W	1800+840lm	601x74x102	Direct/Indirect
PLL309011	22+11W	2640+1320lm	881x74x102	Direct/Indirect
PLL309015	30+15W	3600+1800lm	1161x74x102	Direct/Indirect
PLL309019	38+19W	4560+2280lm	1441x74x102	Direct/Indirect
PLL309022	45+22W	5400+2640lm	1721x74x102	Direct/Indirect
PLL309026	52+26W	6240+3120lm	2001x74x102	Direct/Indirect
PLL309030	60+30W	7200+3600lm	2281x74x102	Direct/Indirect

Technical Drawings

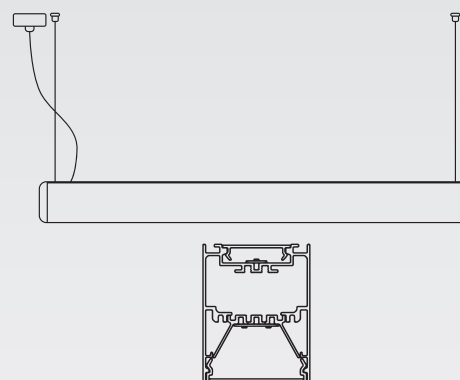

KELVIN
2700K
3000K
4000K
5000K
6000K
6500K

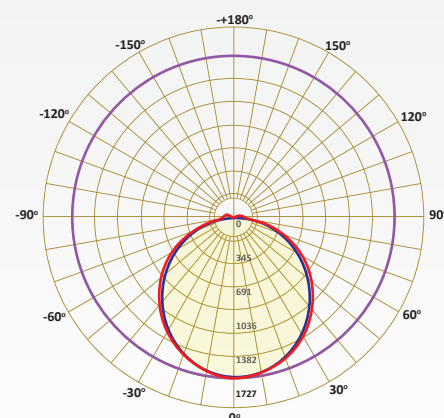

LED DRIVER
TRIDONIC
PHILIPS
SHARP
OSRAM
G-TI
LED CHIP
PHILIPS
SAMSUNG
CREE
BRIDGELUX
CITIZEN