


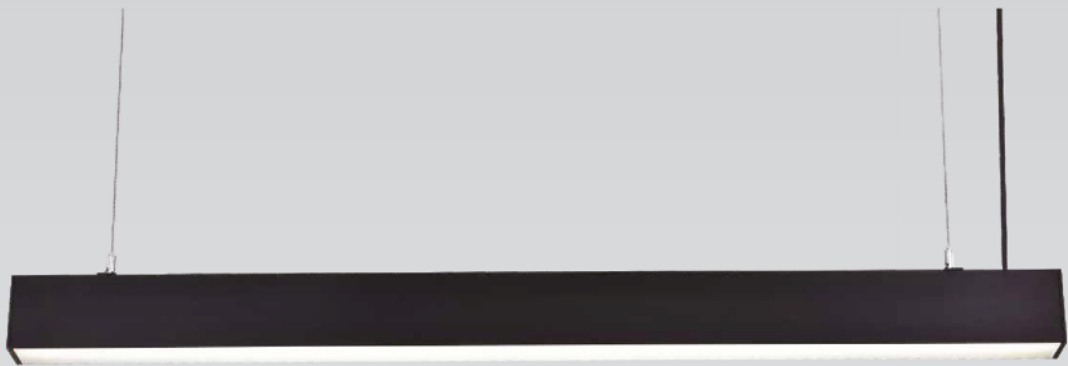

Suspended

Opal Diffuser, Professionally Linear and Modular system illuminates the work area without tiring the eyes. It ensures an excellent uniformity and high luminous efficacy.

HOUSING: Die Cast Aluminium


DIFFUSER: Prismatic Anti-glare

LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

BODY COLOR:


Technical Specifications				
Item Code	Power	Lumen	Dimension	Light
PLL312015	15W	1800lm	601x74x102	Direct
PLL312022	22W	2640lm	881x74x102	Direct
PLL312030	30W	3600lm	1161x74x102	Direct
PLL312038	38W	4560lm	1441x74x102	Direct
PLL312045	45W	5400lm	1721x74x102	Direct
PLL312052	52W	6240lm	2001x74x102	Direct
PLL312060	60W	7200lm	2281x74x102	Direct
PLL313007	15+7W	1800+840lm	601x74x102	Direct/Indirect
PLL313011	22+11W	2640+1320lm	881x74x102	Direct/Indirect
PLL313015	30+15W	3600+1800lm	1161x74x102	Direct/Indirect
PLL313019	38+19W	4560+2280lm	1441x74x102	Direct/Indirect
PLL313022	45+22W	5400+2640lm	1721x74x102	Direct/Indirect
PLL313026	52+26W	6240+3120lm	2001x74x102	Direct/Indirect
PLL313030	60+30W	7200+3600lm	2281x74x102	Direct/Indirect

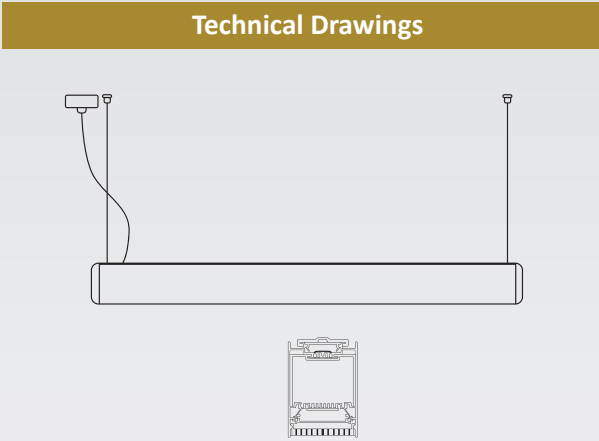

A++

85~265V
50/60HZ

SUSPENDED LIGHTS

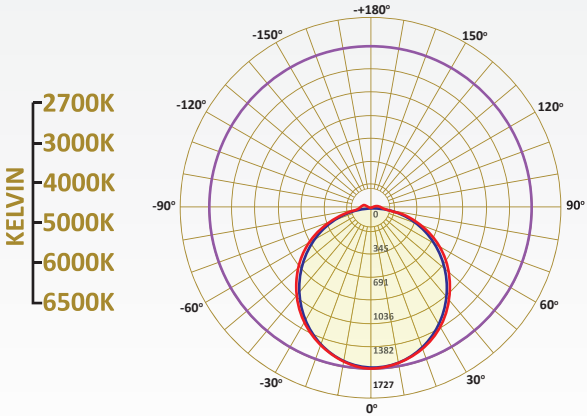

LED DRIVER
TRIDONIC PHILIPS SHARP PHILIPS CREE
OSRAM GTI MW BRIDGELUX SAMSUNG CITIZEN

LED CHIP