



Down Recessed

This Manzolo downlight is directable horizontally of 360° and vertically of 90°. The energy saving and the reasonable price are just two reason more to choose an item which is pure functionality. The extreme attention to every detail in the powder coating finishing is the final touch of beauty and reliability. The high efficiency of the LED source ensures high performances and low consumptions. Available in different sizes and possible applications of this product are many, but it is mainly recommended for shops, shop windows, hotels and everywhere there is need of an accent light.

HOUSING: Die Cast Aluminium with Powder Coating in Choice Color of RAL Colors

DIFFUSER: Tempered Glass

REFLECTOR: Anodized Aluminium




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension	Hole
PLM2473T	29.7W	3564lm	Ø156x102h	Ø142
PLM2473Q	29.7W	3564lm	Ø156x102h	Ø142
PLM2472T	44.3W	5316lm	Ø186x130h	Ø175
PLM2472Q	44.3W	5316lm	Ø186x130h	Ø175

Technical Drawings

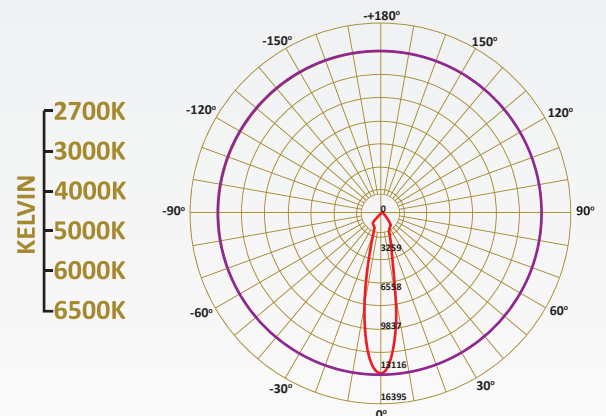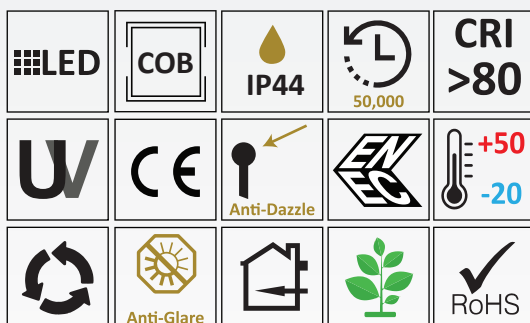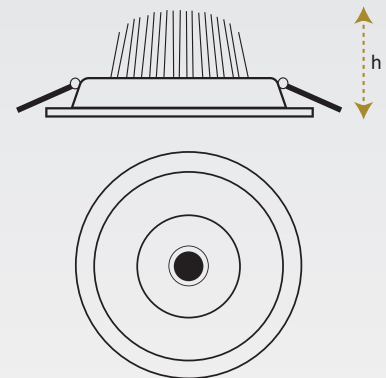

85~265V
50/60HZ

DOWN LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN