



— Ceiling-Surface

The Marte Quadro ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. These items can be used in the applications like shops, hotels, home, offices, restaurants and supermarkets or to replace any surface fixture application. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Tempered frosted glass or polycarbonate PMMA diffuser



LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLM222010	10W	1200lm	95x95x33h
PLM223016	16W	1920lm	145x145x33h
PLM224024	24W	2880lm	200x200x38h

Technical Drawings

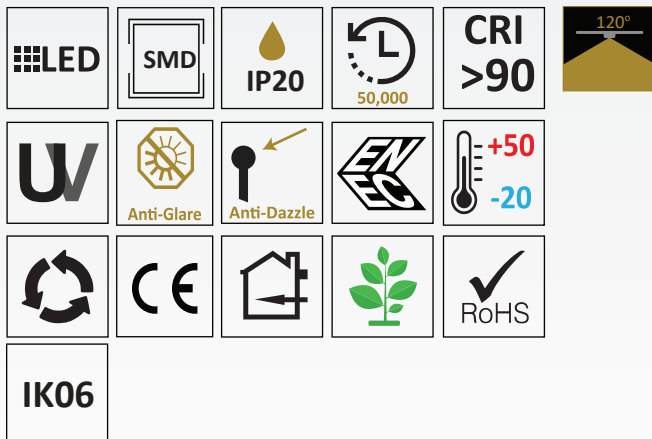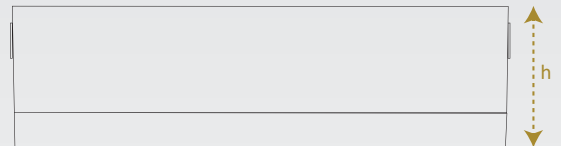

85~265V
50/60HZ

