



— Ceiling-Surface

The Mascali ceiling light allow the most flexibility in a lighting design. The low glare effect ensures a comfortable light effect for the human eye. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. The Mascali Ceiling Light are the character of design, determined with pure die cast aluminium. Its applications are bar, restaurants, museum, art galleries.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Tempered Clear Glass

REFLECTOR: Anodized Aluminium




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLM259020	20W	2000lm	Ø80x125x175h
PLM259025	25W	2500lm	Ø80x125x175h
PLM259030	30W	3000lm	Ø80x125x175h
PLM260035	35W	3500lm	Ø96x195x197h
PLM260040	40W	4000lm	Ø96x195x197h
PLM260050	50W	5000lm	Ø96x195x197h

Technical Drawings

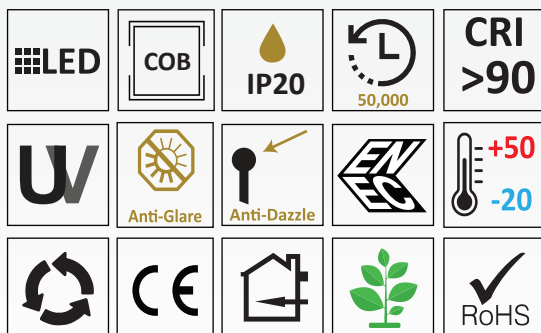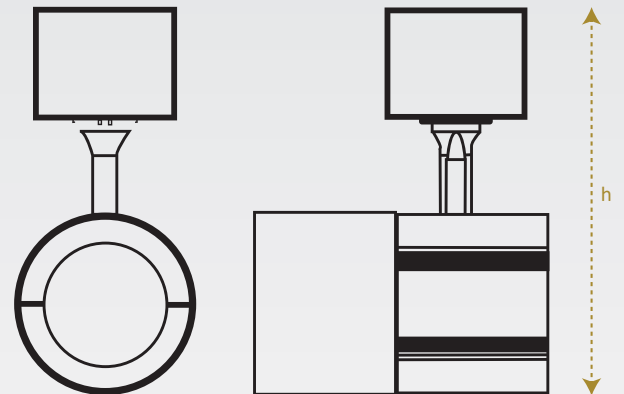

85~265V
50/60HZ

2700K
3000K
4000K
5000K
6000K
6500K

