



— Ceiling-Surface

The Mela ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. The item is available with suspension or ceiling surface mounting kit, to match all the requirements of style. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminum

DIFFUSER: Tempered Frosted Glass or Polycarbonate PMMA Diffuser

REFLECTOR: Polished Aluminum





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLM253012	12W	1236lm	Ø80x105h
PLM253020	20W	2060lm	Ø100x150h
PLM253030	30W	3090lm	Ø150x160h

Technical Drawings

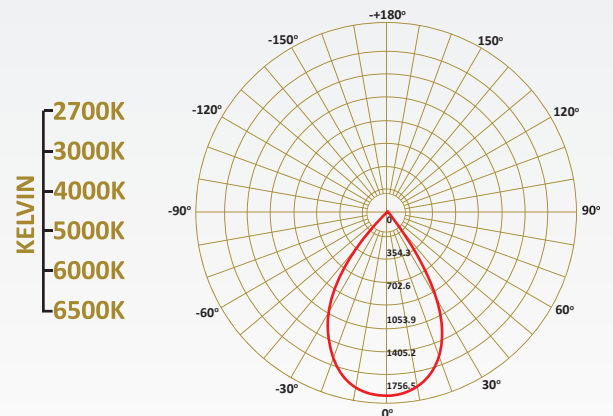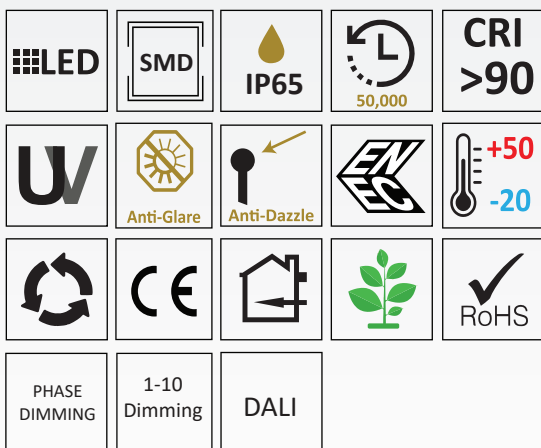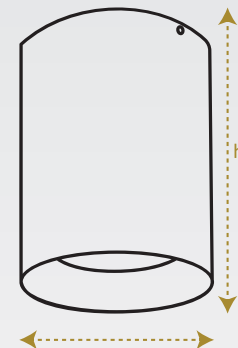

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN