



— Ceiling-Surface

The Meri ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Vandal resistant and V2 self extinguishing polycarbonate UV stabilized

DIFFUSER: Anti Glare with UV Polycarbonate Diffuser

REFLECTOR: Polished Aluminum



LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLL225012	12W	1500lm	Ø350x50h
PLL225018	18W	2250lm	Ø350x50h
PLL225024	24W	3000lm	Ø350x50h

Technical Drawings

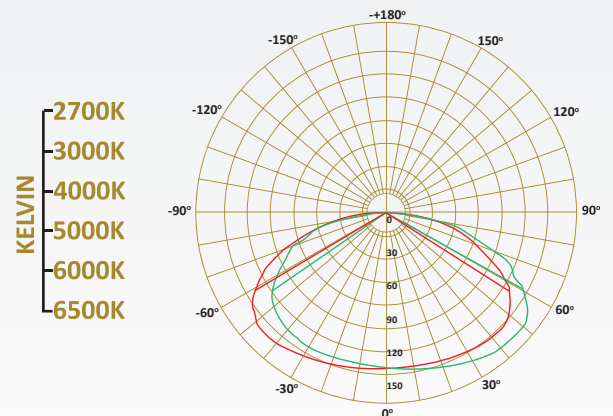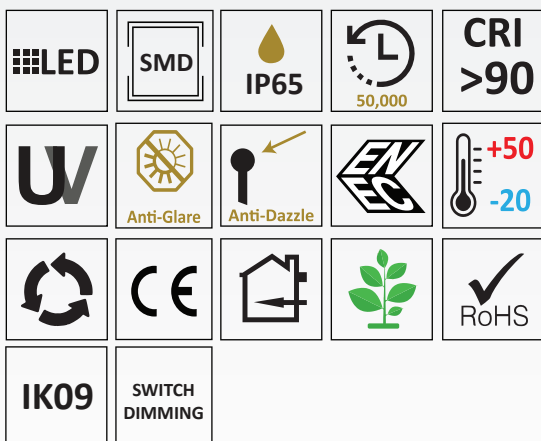

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN