

— Ceiling-Surface

The Naxos ceiling light allow the most flexibility in a lighting design. The low glare effect ensures a comfortable light effect for the human eye. The feature of this item is its emitted light, which is coming both from the centre and around corners. The aluminium body and heat sink ensure high performance in a matter of quality, safety, and durability. The Naxos Ceiling Lights applications are to illuminate shop windows and retail spaces, private home rooms or hotel rooms.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Opal Polycarbonate

REFLECTOR: Polished Aluminium





LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLN218010	10W	1010lm	Ø60x90x168h

Technical Drawings

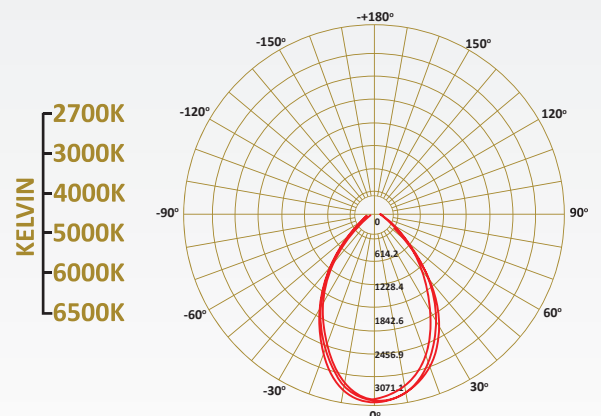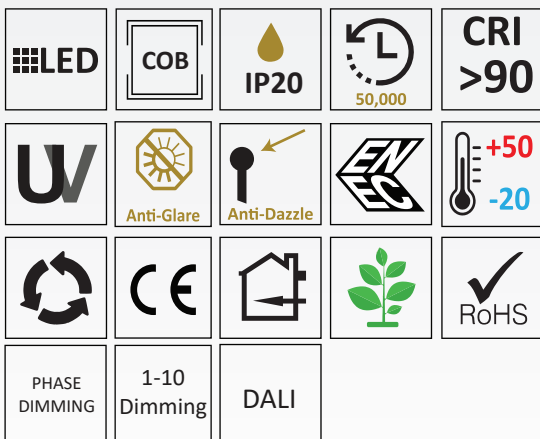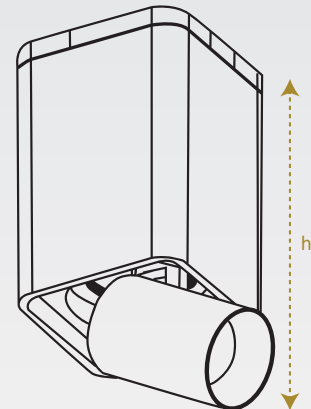

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, G-TI, BRIDGELUX, SAMSUNG, CITIZEN