



— Ceiling-Surface

The Novara Quadro ceiling light has high resistance body tested in IP54 and IP65. It's decorative ceiling light with all the features/characteristics outside. IP65 means the body resistance is best suited for hard metrological conditions or humid weather. The finishing of the item is perfect in every detail with clear diffuser and anodized aluminum reflector. Suitable for commercial and residential applications indoor/outdoor like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

**HOUSING:** Die Cast Aluminum in choice of RAL Colours Powder Coated

**DIFFUSER:** Tempered Clear Glass Diffuser

**REFLECTOR:** Anodized Aluminum





**LED:** Reducy Energy Consumption with L80/B10/F10

**AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

### Technical Specifications

Item Code	Power	Lumen	Dimension
PLN249006	6W	660lm	86x86x115h
PLN250008	8W	880lm	118x118x120h
PLN251012	12W	1320lm	150x150x120h
PLN251018	18W	1980lm	150x150x120h

### Technical Drawings

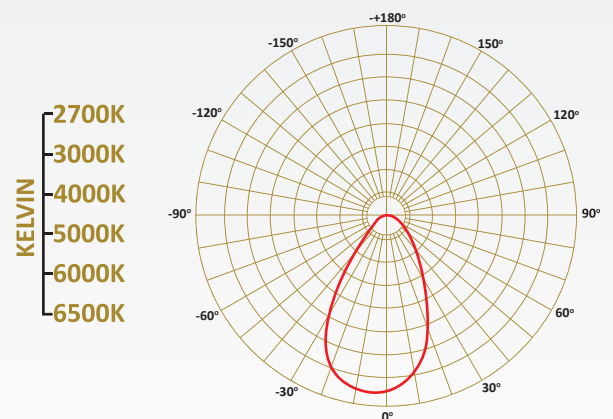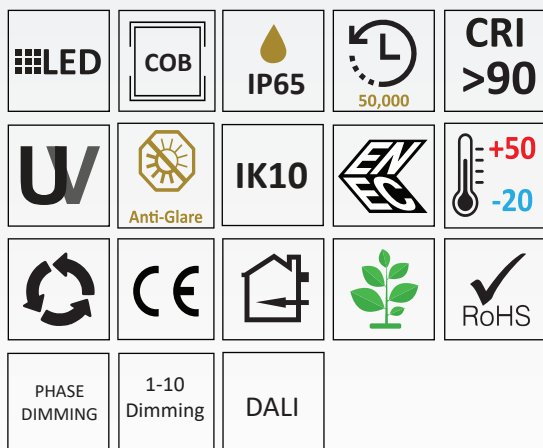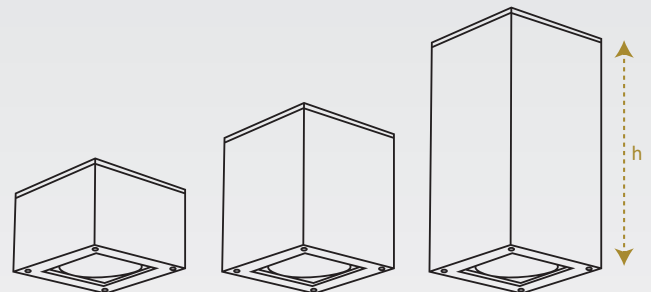

85~265V  
50/60HZ

CEILING LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN