


 Suspended-Surface

The excellent distribution of undirected light from the bespoke diffuser, these product can service a wide range of end users from commercial office space up to high output retail applications. Modern architectural appearance, providing a striking modular fixture and building depth into its recessed offering. Class leading efficacy performance levels are highlighted, with performance reaching 120 lm/W.

HOUSING: Extruded aluminium frame less with powder coating of RAL color option along with the kit to be suspended or recessed or pushing type

MOUNTING: Suspension System with Height Adjustable by Steel Wires



LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE: 50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications


Item Code	Power	Lumen	Dimension
PLP523030	30W	3300lm	295x595x10h
PLP523035	35W	3850lm	295x1195x10h
PLP523036	36W	3960lm	595x595x10h
PLP523039	39.5W	4400lm	595x595x10h
PLP523044	44W	4840lm	595x595x10h
PLP523048	48W	5280lm	595x595x10h

Technical Drawings

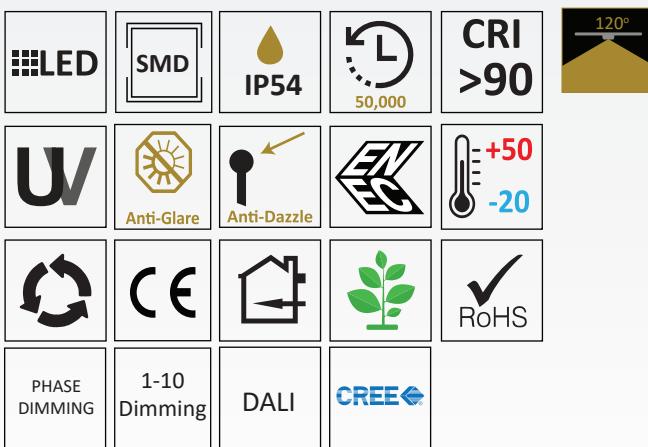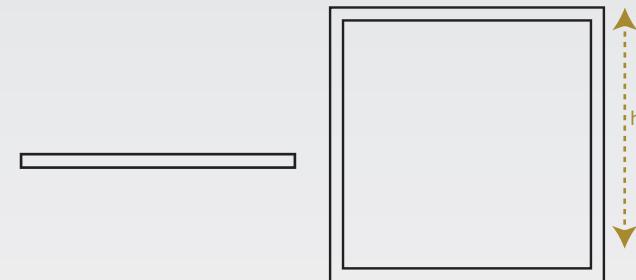

85~265V
50/60HZ

SUSPENDED LIGHTS

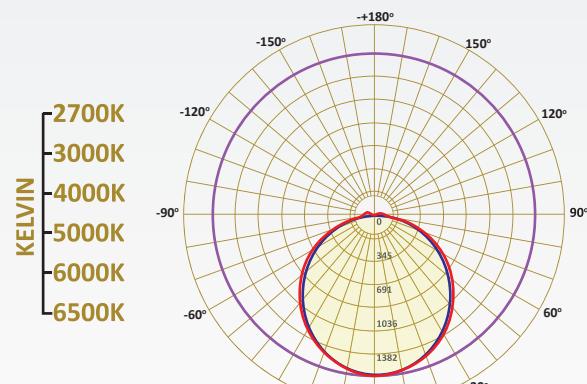

LED DRIVER
TRIDONIC  PHILIPS  SHARP  LED CHIP
OSRAM  GTI  BRIDGELUX  PHILIPS  CREE 
SAMSUNG  CITIZEN 