



— Suspended-Surface

Ragalna is in classic shape with choice of color powder coating. It provides high lumen effect keeping the natural light effect. The LED system guarantees a high efficiency light result, with no glare and a light emission homogeneous and natural at the same time. Ragalna is available with suspension or ceiling surface mounting kit, to match all the requirements of style in the chance we decide to replace all the halogens. The main applications are: shops, malls, showroom, home rooms.

HOUSING: Die Cast Aluminum

DIFFUSER: Optical LED Lens diffuser


LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE: 50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)



Technical Specifications

Item Code	Power	Lumen	Dimension
PLR519012	12W	1260lm	Ø80x105h
PLR520020	20W	2100lm	Ø100x150h
PLR521030	30W	3150lm	Ø150x160h

Technical Drawings

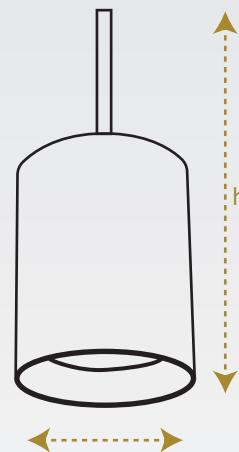

KELVIN
2700K
3000K
4000K
5000K
6000K
6500K

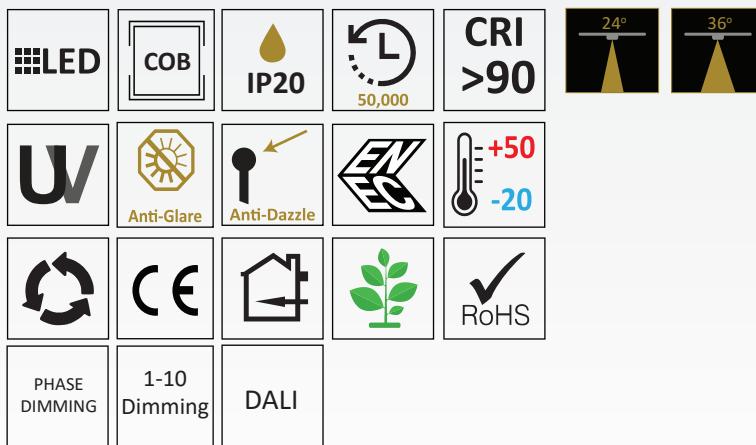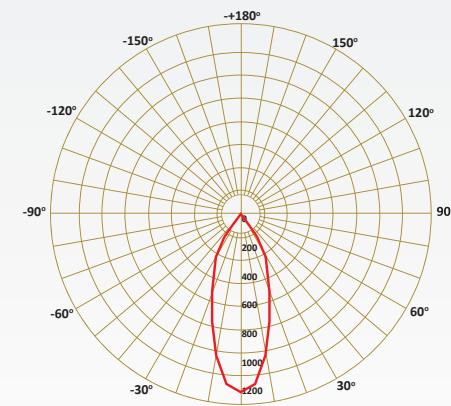

85~265V
50/60HZ

SUSPENDED LIGHTS

LED DRIVER
TRIDONIC
OSRAM

PHILIPS

SHARP

BRIDGELUX

LED CHIP
PHILIPS

CREE

SAMSUNG

CITIZEN