



— Ceiling-Surface

The Revi Quadro ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Die Cast Aluminium with Choice of RAL Colour Powder Coated

DIFFUSER: Clear Tempered Glass




LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLR232012	12W	1440lm	156x156x36h
PLR233018	18W	2100lm	181x181x36h
PLR234025	25W	3000lm	231x231x36h

Technical Drawings

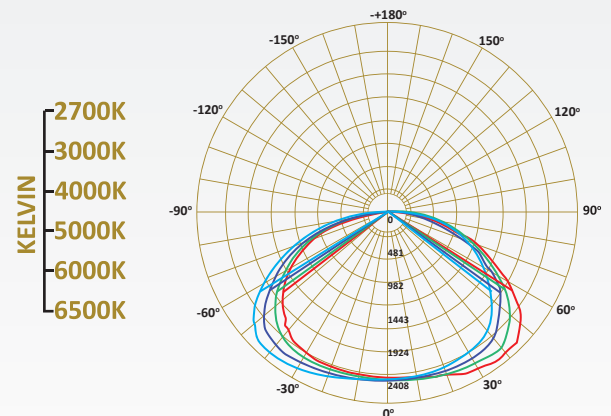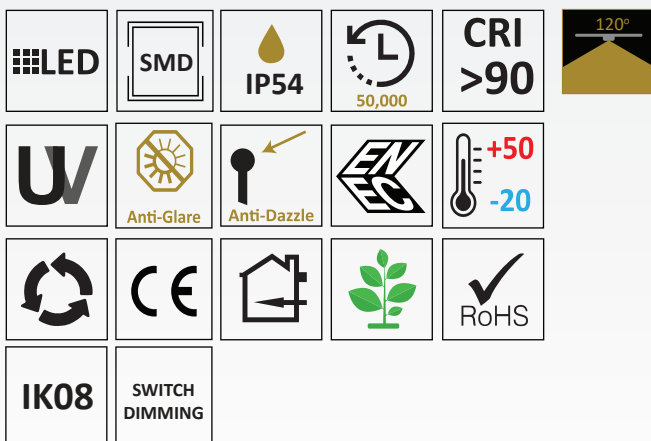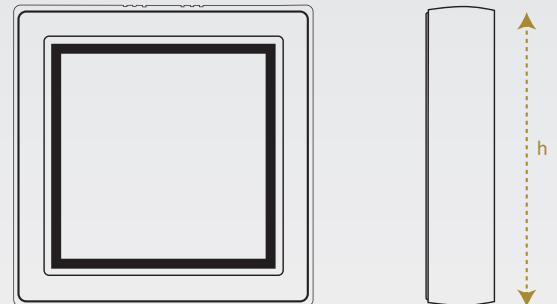

85~265V
50/60HZ

CEILING LIGHTS

LED DRIVER: TRIDONIC, PHILIPS, SHARP, LED CHIP: PHILIPS, CREE, OSRAM, GTI, BRIDGELUX, SAMSUNG, CITIZEN