



— Ceiling-Surface

The Revi ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The diffuser takes care also about the glare effect, so the light does not disturb the human eye. Suitable for commercial and residential applications like office, supermarket, shop, school, hotel, restaurant, home. It's perfect for ambient lighting; the light is pure and comfortable.

HOUSING: Vandal resistant and V2 self extinguishing polycarbonate UV stabilized

DIFFUSER: Anti-glare with UV polycarbonate diffuser

REFLECTOR: Polished Aluminum


LED: Reducy Energy Consumption with L80/B10/F10

AVERAGE LIFE:50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications

Item Code	Power	Lumen	Dimension
PLR228012	12W	1440lm	Ø156x36h
PLR229018	18W	2100lm	Ø181x36h
PLR230025	25W	3000lm	Ø231x36h

Technical Drawings

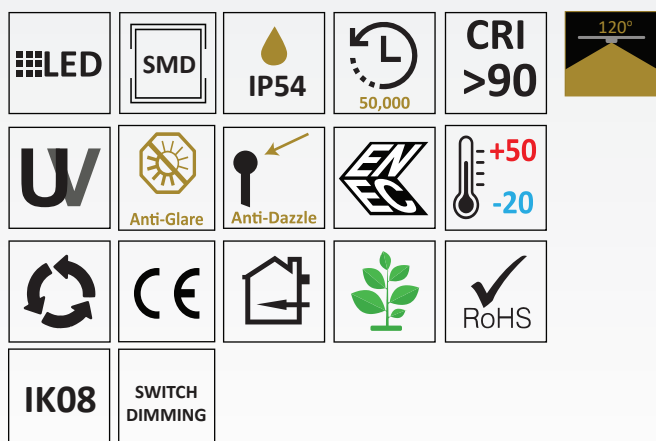

85~265V
50/60HZ

