


Wall-Surface

A wall surface light is used to be fixed on the wall. It is designed to deliver both functional and ambient lighting. Its compact cylindrical body made by die cast aluminum houses a recessed integrated LED source, preventing glare and hotspot issue once lit. They can be adjusted in different directions and provide versatility in lighting design. It enhances overall room brightness and creates mood lighting. It Can be installed vertically or horizontally giving you convenient control of your lighting environment. It is suitable for application as public, residential or pedestrian areas, parks, gardens and shopping malls.

- HOUSING:** Die Cast Aluminum in choice of RAL Colours Powder Coated
- DIFFUSER:** Transparent Tempered Glass Diffuser
- REFLECTOR:** Anodized Aluminum
- LED:** Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications			
Item Code	Power	Lumen	Dimension
PLT220008	8W	960lm	90x130x150h
PLT220012	12W	1440lm	108x147x180h
PLT220016	2x8W	1920lm	90x130x200h
PLT220024	2x12W	2880lm	108x147x260h

Technical Drawings

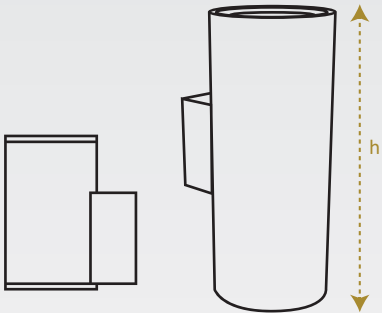

A++

85~265V
50/60HZ

