


Wall-Surface

A wall surface light is used to be fixed on the wall. It is designed to deliver both functional and ambient lighting. Its compact quad cylindrical body made by die cast aluminum houses a recessed integrated LED source, preventing glare and hotspot issue once lit. They can be adjusted in different directions and provide versatility in lighting design. It enhances overall room brightness and creates mood lighting. It Can be installed vertically or horizontally giving you convenient control of your lighting environment. It is suitable for application as public, residential or pedestrian areas, parks, gardens and shopping malls.

- HOUSING:** Die Cast Aluminum in choice of RAL Colours Powder Coated
- DIFFUSER:** Transparent Tempered Glass Diffuser
- REFLECTOR:** Anodized Aluminum
- LED:** Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

Technical Specifications			
Item Code	Power	Lumen	Dimension
PLT219008	8W	960lm	86x133x130h
PLT219015	15W	1800lm	150x207x200h
PLT219016	2x8W	1920lm	86x133x180h
PLT220030	2x15W	3600lm	150x207x300h

Technical Drawings

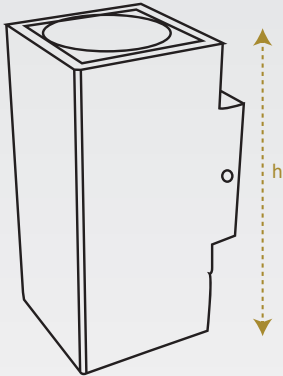

LED

COB

IP65

50,000

CRI >90

UW

Anti-Glare

Anti-Dazzle

EN

+50
-20


Recycling

CE

RoHS


IK08

Light Pollution Control



85~265V
50/60HZ

WALL SURFACE LIGHTS

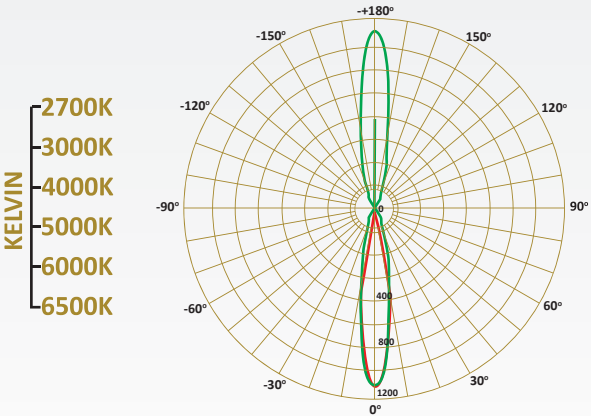

- LED DRIVER
TRIDONIC
OSRAM
- PHILIPS
GTI
- SHARP
BRIDGELUX
- LED CHIP
PHILIPS
SAMSUNG
- CREE
CITIZEN