




Ceiling-Surface

The Zido ceiling light allow the most flexibility in a lighting design. The high efficiency LED system permits to deliver excellent performance while saving energy. The color temperature and color rendering index are maintained constant through the lifespan of these products, guaranteeing a consistent light quality. We provide a wide range of LED downlight from 3 to 10 inch in distinguished design. These items can be used in the applications like shops, hotels, home, offices, restaurants and supermarkets or to replace any surface fixture application.

- HOUSING:** Die Cast Aluminium with Choice of RAL Colour Powder Coated
- DIFFUSER:** Clear Tempered Glass
- LED:** Reducy Energy Consumption with L80/B10/F10
- AVERAGE LIFE:**50,000 hrs Lifetime Working Under Temp (-20°C - 50°C)

| Technical Specifications |       |        |           |
|--------------------------|-------|--------|-----------|
| Item Code                | Power | Lumen  | Dimension |
| PLZ202005                | 5W    | 1020lm | Ø68x87h   |
| PLZ203010                | 10W   | 1530lm | Ø87x88h   |
| PLZ204015                | 15W   | 1020lm | Ø108x108h |
| PLZ205020                | 20W   | 1530lm | Ø128x128h |
| PLL206025                | 25W   | 1020lm | Ø148x148h |

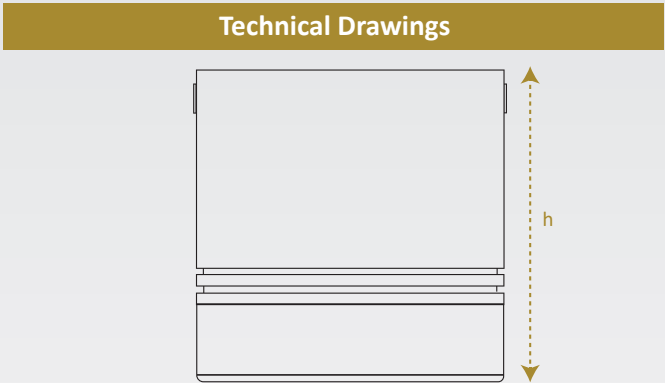

LED

SMD

IP20

50,000

CRI >90

120°

UV

Anti-Glare

Anti-Dazzle

EN

+50  
-20

PHASE DIMMING

CE

1-10 Dimming

DALI

RoHS

